




OMRAXIS

Manufacturer & Supplier of Circlips, Washers, Dowel Pins
and Precision Spring Steel Components

Standard External Circlip: IS 3075, DIN 471

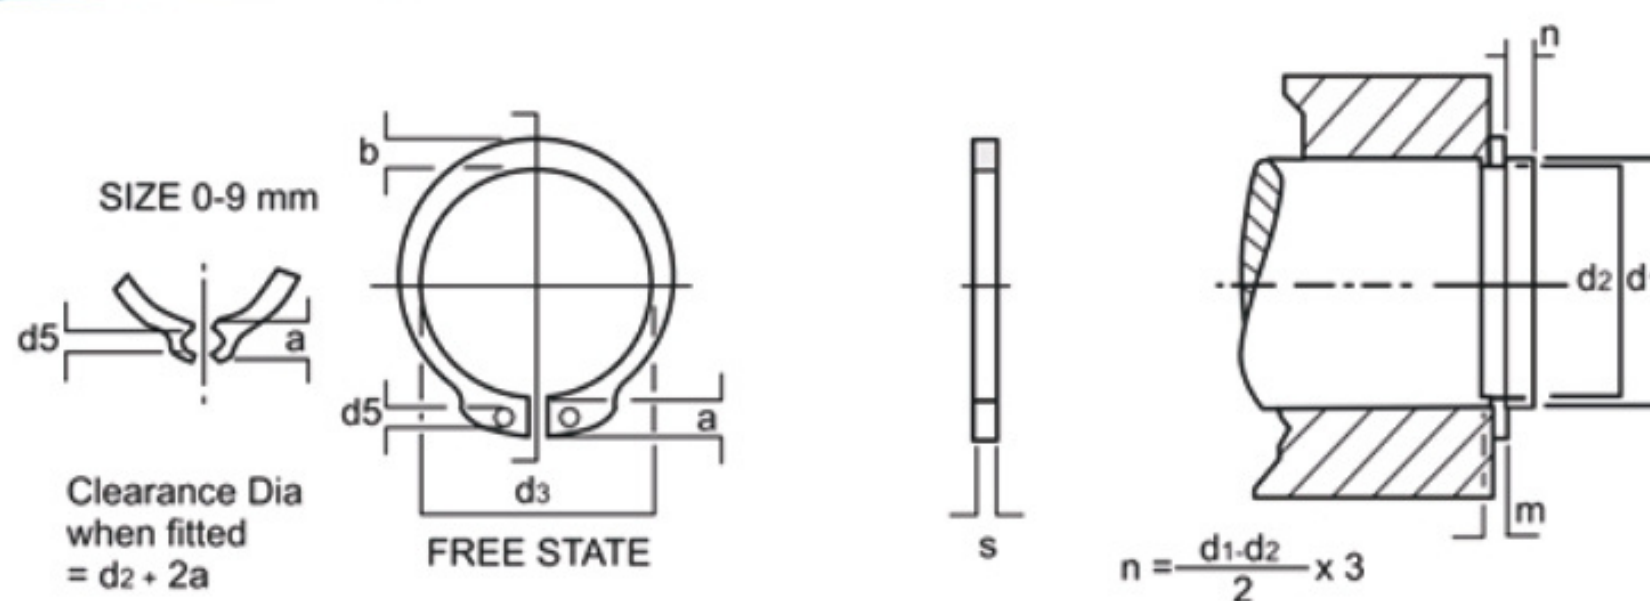

Material: Carbon Spring Steel

Finish: Phosphating or as per Requirements

Hardness: d1 - 3 to 47mm : 47 to 54 HRC

d1 - 48 to 200mm : 44 to 51 HRC

d1 - 200 to 300mm : 390 to 470 HRC

shall Dia, d1 Nom. Size	Circlips							Groove				
	s		d3		a	b ^d	d ₅	d2t		mt	t	n
	Size	Tolerance	Size	Tolerance	Max.	mm	Min.	size	Tolerance	H13		Min
3	0.4	± 0.02	2.7	+0.04 -0.15	1.9	0.8	1	2.8	0+0.04 (H10)	0.5	0.1	0.3
4	0.4		3.7		2.2	0.9	1	3.8	0-0.048 (H10)	0.5	0.1	0.3
5	0.6	± 0.03	4.7		2.5	1.1	1	4.8	0-0.06 (H10)	0.7	0.1	0.3
6	0.7		5.6	+0.06 -0.18	2.7	1.3	1.2	5.7		0.8	0.15	0.5
7	0.8		6.5		3.1	1.4	1.2	6.7		0.9	0.15	0.5
8	0.8	± 0.04	7.4		3.2	1.5	1.2	7.6	0-0.11 (H11)	0.9	0.2	0.6
9	1		8.4	+0.10 -0.36	3.3	1.7	1.2	8.6		1.1	0.2	0.6
10	1		9.3		3.3	1.8	1.5	9.6		1.1	0.2	0.6
11	1		10.2		3.3	1.8	1.5	10.5		1.1	0.25	08
12	1		11	+0.41 -0.42	3.3	1.8	1.7	11.5		1.1	0.25	09
13	1		11.9		3.4	2	1.7	12.4		1.1	0.3	0.9
14	1		12.9		3.5	2.1	1.7	13.4		1.1	0.3	0.9
15	1		13.8		3.6	2.2	1.7	14.3		1.1	0.35	1.1
16	1		14.7		3.7	2.3	1.7	15.2		1.1	0.4	1.2
17	1		15.7		3.8	2.3	1.7	16.2		1.1	0.4	1.2
18	1.2		16.5		3.9	2.4	2	17	0-0.13 (H11)	1.3	0.5	1.5
19	1.2		17.5		3.9	2.5	2	18		1.3	0.5	1.5
20	1.2		18.5	+ 0.13 -0.42	4	2.6	2	19		1.3	0.5	1.5
21	1.2	± 0.05	19.5		4.1	2.7	2	20	0-0.21 (H12)	1.3	0.5	1.5
22	1.2		20.5		4.2	2.8	2	21		1.3	0.5	1.5
24	1.2		22.2	+ 0.41 -0.42	4.4	3	2	22.9		1.3	0.55	1.7
25	1.2		23.2		4.4	3	2	24.9		1.3	0.55	1.7
26	1.2		24.2		4.5	3.1	2	24.9		1.3	0.55	1.7
28	1.5		25.9		4.7	3.2	2	26.6		1.6	0.7	2.1
29	1.5		26.9		4.8	3.4	2	27.6		1.6	0.7	2.1
30	1.5		27.9		5	3.5	2	28.6		1.6	0.7	2.1
32	1.5		29.6		5.2	3.6	2.5	30.3		1.6	0.85	2.6
34	1.5		31.5		5.4	3.8	2.5	31.3		1.6	0.85	2.6

Standard External Circlip: IS 3075, DIN 471




shall Dia, d1 Nom. Size	Circlips							Groove				
	s		d3		a	b ^d	d	d2t		mt	t	n
	Size	Tolerance	Size	Tolerance	Max.	±	Min.	size	Tolerance	H13		Min
35	1.5	± 0.05	32.2	+0.25 -0.5	5.6	3.9	2.5	33	0-0.25 (H12)	1.6	1	3
36	1.75		33.2		5.6	4	2.5	34		1.85	1	3
38	1.75		35.2		5.8	4.2	2.5	36		1.85	1	3
40	1.75		36.5	+0.39 -0.9	6	4.4	2.5	37.5		1.85	1.25	3.8
42	1.75		38.5		6.5	4.5	2.5	39.5		1.85	1.25	3.8
45	1.75		41.5		5.7	4.7	2	52.5		1.85	1.25	3.8
48	1.75		44.5		6.9	5	2.5	45.5		1.85	1.25	3.8
50	2		45.8		7	5.1	2.5	47		2.15	1.5	4.5
52	2	±0.06	47.8	+0.46 -1.1	7.2	5.2	2.5	49	0-0.30 (H12)	2.15	1.5	4.5
55	2		50.8		7.3	5.4	2.5	52		2.15	1.5	4.5
56	2		51.8		7.3	5.5	2.5	53		2.15	1.5	4.5
58	2		53.8		7.4	5.6	2.5	55		2.15	1.5	4.5
60	2		55.8		7.5	5.8	2.5	57		2.15	1.5	4.5
62	2		57.8		7.6	6	2.5	59		2.15	1.5	4.5
63	2		58.8		7.8	6.2	2.5	60		2.15	1.5	4.5
65	2.5		60.8		7.8	6.3	3	62		2.65	1.5	4.5
68	2.5		63.5	+0.46 -1.1	8	6.5	3	65	0 -0. (H12)	2.65	1.5	4.5
70	2.5		65.5		8.1	6.6	3	67		2.65	1.5	4.5
72	2.5		67.5		8.2	6.8	3	69		2.65	1.5	4.5
75	2.5		70.5		8.4	7	3	72		2.65	1.5	4.5
78	2.5		73.5		8.6	7.3	3	75		2.65	1.5	4.5
80	2.5		74.5		8.6	7.4	3	76.5		2.65	1.75	5.3
82	2.5	± 0.7	76.5		8.7	7.6	3	78.5		2.65	1.75	5.3
85	3		79.5	+.54 -1.3	8.7	7.8	3.5	81.5	0 -0.35 (H12)	2.15	1.75	5.3
88	3		82.5		8.7	8	3.5	84.5		3.15	1.75	5.3
90	3		84.5		8.8	8.2	3.5	86.5		3.15	1.75	5.3
95	3		89.5		9.4	8.6	3.5	91.5		3.15	1.75	5.3
100	3	± 0.8	94.5		9.6	9	3.5	96.5	0 -0.54 (H13)	3.15	1.75	5.3
105	4		98		9.9	9.3	3.5	101		4.15	2	6
110	4		103		10.1	9.6	3.5	106		4.15	2	6
115	4		108		10.6	9.8	3.5	111		4.15	2	6
120	4		113	+0.63 -1.5	11	10.2	3.5	116	0 -0.63 (H13)	4.15	2	6
125	4		118		11.4	10.4	4	121		4.15	2	6
130	4		123		11.6	10.7	4	126		4.15	2	6
135	4		128		11.8	11	4	131		4.15	2	6
140	4		133		12	11.2	4	136		4.15	2	6
145	4		138		12.2	11.5	4	141		4.15	2	6
150	4		142		13	11.8	4	145		4.15	2.5	7.5
155	4		146		13	12	4	150		4.15	2.5	7.5
160	4		151		13.3	12.2	4	155		4.15	2.5	7.5
165	4		155.5		13.5	12.5	4	160		4.15	2.5	7.5
170	4		160.5		13.5	12.9	4	165		4.15	2.5	7.5
175	4		165.5		13.5	12.9	4	170		4.15	2.5	7.5
180	4		170.5		14.2	13.5	4	175		4.15	2.5	7.5
185	4		175.5		14.2	13.5	4	180		4.15	2.5	7.5
190	4		180.5		14.2	14	4	185		4.15	2.5	7.5

shall Dia, d1 Nom. Size	Circlips							Groove				
	s		d3		a	b ^d	d ₅	d2t		mt	t	n
	Size	Tolerance	Size	Tolerance	Max.	r_{max}	Min.	size	Tolerance	H13		Min
195	4	± 0.9	185.5	+0.72 -1.7	14.2	14	4	190	0 -0.81 (H13)	4.15	2.5	7.5
200	4		190.5		14.2	14	4	195		4.15	2.5	7.5
210	5		198		14.2	14	4	204		5.15	3	9
220	5		208		14.2	14	4	214		5.15	3	9
230	5		218		14.2	14	4	224		5.15	3	9
240	5		228		14.2	14	4	234		5.15	3	9
250	5		238	+0.13 -0.42	14.2	14	4	244	0 -0.11 (H11)	5.15	3	9
260	5		245		16.2	16	5	252		5.15	4	12
270	5		255		16.2	16	5	262		5.15	4	12
280	5		265		16.2	16	5	272		5.15	4	12
290	5		275		16.2	16	5	282		5.15	4	12
300	5		285		16.2	16	5	292		5.15	4	12

Heavy Pattern: IS 3075

15	1.5	± 0.5	13.8	+0.25 -0.5	4.8	2.4	2	14.3	0 -0.13 (H11)	1.6	0.35	1.1
16	1.5		14.7		5	2.5	2	15.2		1.6	0.4	1.2
17	1.5		15.7		5	2.6	2	16.2		1.6	0.4	1.2
18	1.5		16.5		5.1	2.7	2	17		1.6	0.5	1.5
20	1.75		18.5		5.5	3	2	19		1.85	0.5	1.5
22	1.75		20.5	+0.39 -0.9	6	3.1	2	21	0 -0.21 (H12)	1.85	0.5	1.5
24	1.75	± 0.6	22.2		6.3	3.2	2	22.9		1.85	0.55	1.7
25	2		23.2		6.4	3.4	2	23.9		2.15	0.55	1.7
28	2		25.9		6.5	3.5	2	26.9		2.15	0.7	2.1
30	2		27.9		6.5	4.1	2	28.6		2.15	0.7	2.1
32	2		29.6		6.5	4.1	2.5	30.3		2.15	0.85	2.6
34	2.5	± 0.6	31.5	+0.46 -1.1	6.6	4.2	2.5	32.3	0 -0.25 (H12)	2.65	0.85	2.6
35	2.5		32.2		6.7	4.2	2.5	33		2.65	1	3
38	2.5		35.2		6.8	4.3	2.5	36		2.65	1	3
40	2.5		36.5		7	4.4	2.5	37.5		2.65	1.25	3.8
42	2.5		38.5		7.2	4.5	2.5	39.5		2.65	1.25	3.8
45	2.5		41.5		7.5	4.7	2.5	42.5		2.65	1.25	3.8
48	2.5	± 0.7	44.5	+0.54 -1.3	7.8	5	2.5	45.5	0 -0.30 (H12)	2.65	1.25	3.8
50	3		45.8		8	5.1	2.5	47		3.15	1.5	4.5
52	3		47.8		8.2	5.2	2.5	49		3.15	1.5	4.5
55	3		50.8		8.5	5.4	2.5	52		3.15	1.5	4.5
58	3		53.8		8.8	5.6	2.5	55		3.15	1.5	4.5
60	3		55.8		9	5.8	2.5	57		3.15	1.5	4.5
65	4	± 0.8	60.8	+0.54 -1.3	9.3	6.3	3	62	0 -0.35 (H12)	4.15	1.5	4.5
70	4		65.5		9.5	6.6	3	67		4.15	1.5	4.5
75	4		70.5		9.7	7	3	72		4.15	1.5	4.5
80	4		74.5		9.8	7.4	3	76.5		4.15	1.75	5.3
85	4		79.5		10	7.8	3.5	81.5		4.15	1.75	5.3
90	4		84.5		10.2	8.2	3.5	86.5		4.15	1.75	5.3
100	4		94.5		10.5	9	3.5	96.5		4.15	1.75	5.3

Inverted External Circlip – J Type – DIN 5108, M1408

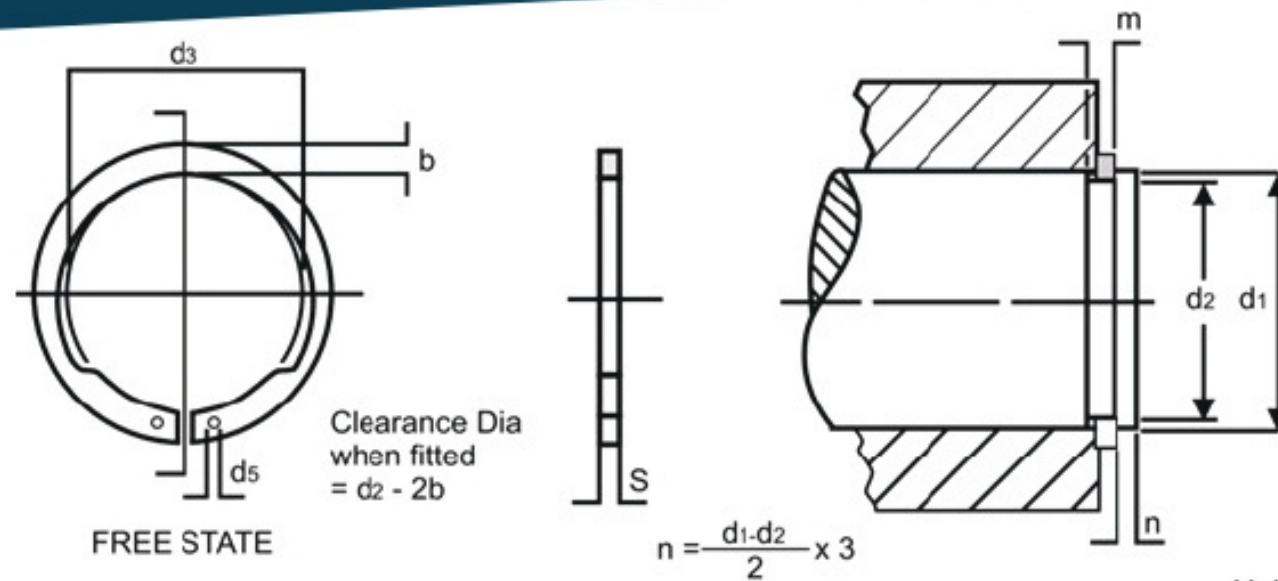

Material: Carbon Spring Steel

Finish: Phosphating or as per requirements

Hardness: d1 - 8 to 48mm : 47 to 54HRC

d1 - 48 to 200mm : 44 to 51HRC


d1 - 200 to 300mm : 40 to 47HRC

Nominal Dia. (d1)	Thickness (S)	Tolerance	Unst. Diam. (d3)	Tolerance	Beam	Lug Hole(d5) min	Groove Diameter (d2)	Toleran.	Groove Width (m)	Rad.Dep of Gro-ove (t)
12	1.00	- 0.06	11.00	+0.10-0.36	2.1	1.3	11.5	-0.11	1.10	0.25
13	1.00		11.90		2.1	1.3	12.4		1.10	0.30
14	1.00		12.90		2.1	1.3	13.4		1.10	0.30
15	1.00		13.80		2.1	1.3	14.3		1.10	0.35
16	1.00		14.70		2.3	1.3	15.2		1.10	0.40
17	1.00		15.70		2.4	1.3	16.2		1.10	0.40
18	1.20		16.50	+0.13-0.42	2.6	1.5	17.0	-0.15	1.30	0.50
20	1.20		18.50		2.8	1.5	19.0		1.30	0.50
21	1.20		19.35		2.8	1.5	20.0		1.30	0.50
22	1.20		20.50		3.0	1.5	21.0		1.30	0.50
23	1.20	- 0.06	21.50	+0.21-0.42	3.1	1.5	22.0	-0.15	1.30	0.50
24	1.20		22.20		3.2	1.5	22.9		1.30	0.55
25	1.20		23.20		3.4	1.5	23.9	-0.15	1.30	0.55
26	1.50		24.20		3.5	1.5	24.9		1.30	0.55
28	1.50		25.90	+0.39-0.90	3.8	1.5	26.6		1.60	0.75
30	1.50		27.90		3.9	2.0	28.6	-0.25	1.60	0.75
32	1.50		29.60		4.0	2.0	30.3		1.60	0.85
34	1.50		31.50		3.5	2.0	32.3		1.60	0.85
35	1.75		32.20		4.2	2.0	33.0		1.60	1.10
38	1.75		34.50		4.5	2.0	35.8		1.85	1.20
40	1.75	-0.07	34.50	+0.46-1.10	4.7	2.0	39.5	-0.25	1.85	1.25
42	1.75		38.50		4.7	2.0	42.5		1.85	1.25
45	1.75		41.50		4.7	2.0	44.5		1.85	1.25
47	1.75		43.50		5.0	2.0	45.5		1.85	1.25
48	2.00		44.50		5.2	2.0	47.0		1.85	1.25
50	2.00		45.80		5.2	2.5	52.0		2.15	1.50
55	2.00		50.80		5.8	2.5	55.0	-0.25	2.15	1.50
58	2.00		53.80		5.8	2.5	57.0		2.15	1.50
60	2.50		55.80		5.8	2.5	62.0		2.15	1.50
65	2.50		60.80		6.0	2.5	67.0		2.65	1.50
70	2.50		65.50		6.5	2.5	69.0		2.65	1.50
72	2.50		67.50		6.5	2.5	72.0		2.65	1.50
72	2.50		67.50		6.5	2.5	69.0		2.65	1.50
75	2.50		70.50		6.5	2.5	72.0		2.65	1.50



Nominal Dia. (d1)	Thickness (S)	Tolerance	Unst. Diam. (d3)	Tolerance	Beam	Lug Hole(d5) min	Groove Diameter (d2)	Toleran.	Groove Width (m)	Rad.Dep of Gro-ove (t)
80	2.50	-0.07	74.50	+0.46-1.10	7.0	2.5	76.5	-0.30	2.65	1.75
80	2.50		74.50		7.0	2.5	76.5	-0.30	2.65	1.75
82	2.50		76.50		7.0	2.5	78.5	-0.35	2.65	1.75
85	3.00	-0.08	79.50		7.4	3.0	81.5	-0.35	3.15	1.75
87	3.00		79.50		7.4	3.0	81.5	-0.35	3.15	1.75
90	3.00		84.50	+0.54-1.30	7.4	3.0	86.5	-0.35	3.15	1.75
95	3.00		89.50		8.0	3.0	91.5	-0.35	3.15	1.75
100	3.00		94.50		8.0	3.0	96.5	-0.35	3.15	1.75

K Type External Circlip – DIN 983

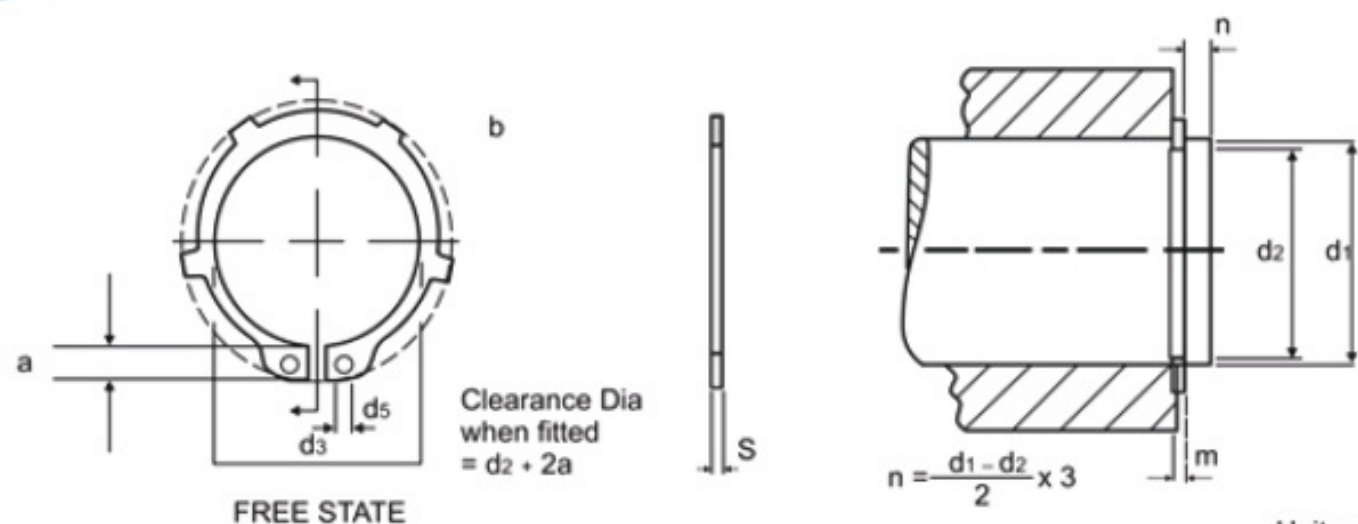


Material: Carbon Spring Steel
Hardness: d1 - 17 to :47/54 HRC
d1 > 48 :44/51 HRC

Finish: Phosphating or as per requirements

Shaft dia, d1	Circlip							Groove				
Nominal size	s		d3		a	b	d5	d2		m	t	n
		Tolera.		Tolera.	max	approx	min		Tolera.	H13		min
16	1	0 -0.06	14.7	+0.1 -0.36	3.5	2.3	1.7	15.2	0 -0.11	1.1	0.4	1.2
17	1		15.7		3.6	2.3	1.7	16.2		1.1	0.4	1.2
18	1.2		16.5		3.7	2.4	2	17		1.3	0.5	1.5
19	1.2		17.5		3.7	2.5	2	18		1.3	0.5	1.5
20	1.2	0 -0.06	18.5	+0.13 -0.42	3.8	2.6	2	19	0 -0.13	1.3	0.5	1.5
22	1.2		20.5		4	2.8	2	21		1.3	0.5	1.5
23	1.2		21.5	+0.21 -0.42	4.1	2.9	2	22	0 -0.21	1.3	0.5	1.5
24	1.2		22.2		4.2	3	2	22.9		1.3	0.55	1.7
25	1.2		23.2		4.3	3	2	23.9		1.3	0.55	1.7
26	1.2		24.2		4.4	3.1	2	24.9		1.3	0.55	1.7
28	1.5		25.9	0.25 -0.5	4.5	3.2	2	26.6	0 -0.25	1.6	0.7	2.1
30	1.5		27.9		4.7	3.5	2	28.6		1.6	0.7	2.1
32	1.5		29.6		5	3.6	2.5	30.3		1.6	0.85	2.6
35	1.5		32.2		5.2	3.9	2.5	33		1.6	1	3
38	1.75		35.2		5.5	4.2	2.5	36		1.85	1	3
40	1.75		36.5		7.2	4.4	2.5	37.5		1.85	1.25	3.8
42	1.75		38.5	0.39 -0.9	7.2	4.5	2.5	39.5		1.85	1.25	3.8
45	1.75		41.5		7.2	4.7	2.5	42.5		1.85	1.25	3.8
47	1.75		43.5		7.2	4.9	2.5	44.5		1.85	1.25	3.8
48	1.75		44.5		7.2	5	2.5	45.5		1.85	1.25	3.8
50	2	0 -0.07	45.8	0.46 -1.1	8.2	5.1	2.5	47	0 -0.3	2.15	1.5	4.5
55	2		50.8		8.2	5.4	2.5	52		2.15	1.5	4.5
57	2		52.8		8.2	5.5	2.5	54		2.15	1.5	4.5
58	2		53.8		8.2	5.6	2.5	55		2.15	1.5	4.5
60	2		55.8		8.2	5.8	2.5	57		2.15	1.5	4.5
62	2.5		57.8		8.2	6	2.5	59		2.15	1.5	4.5
65	2.5		60.8		10.2	6.3	3	62		2.65	1.5	4.5
67	2.5		62.5		10.2	6.4	3	64		2.65	1.5	4.5
68	2.5		63.5		10.2	6.5	3	65		2.65	1.5	4.5
70	2.5		65.5		10.2	6.6	3	67		2.65	1.5	4.5
75	2.5		70.5		10.2	7	3	72		2.65	1.5	4.5
80	2.5		74.5		10.2	7.4	3	76		2.65	1.75	5.3
85	3	0 -0.08	79.5	0.54 -1.3	10.2	7.8	3.5	81.5	0 -0.35	3.15	1.75	5.3
90	3		84.5		10.2	8.2	3.5	86.5		3.15	1.75	5.3
95	3		89.5		10.2	8.6	3.5	91.5		3.15	1.75	5.3
100	3		94.5		10.2	9	3.5	96.5		3.15	1.75	5.3
110	4	0 -0.1	103		12.2	9.6	3.5	106	0 -0.54	4.15	2	6
120	4		113		14.2	10.2	3.5	116		4.15	2	6
130	4		123		14.2	10.7	4	126	0 -0.63	4.15	2	6
140	4		133		14.2	11.2	4	136		4.15	2	6

Standard Internal Circlip: IS 3075, DIN 472

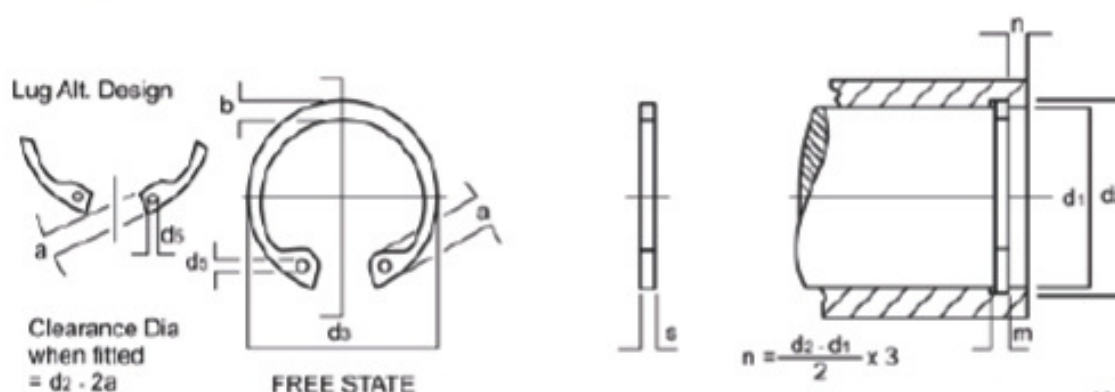

Material: Carbon Spring Steel

Hardness: d1 - 8 to 48mm : 47 to 54HRC

d1 - 48 to 200mm : 44 to 51HRC

d1 - 200 to 300mm : 40 to 47HRc

Finish: Phosphating or as per Requirements

shall Dia, d1 Nom. Size	Circlips							Groove				
	s		d3		a	b ^d	d5	d2t		mt	t	n
	Size	Tolerranc.	Size	Tolerranc.	Max.	~	Min.	size	Tolerance	H13		Min
8	0.8	± 0.03	8.7	+0.36 -0.10	2.4	1.1	1	8.4	+0.09 0 (H10)	0.9	0.2	0.6
9	0.8		9.8		2.5	1.3	1	9.4	+0.011 0 (H11)	0.9	0.2	0.6
10	1	± 0.04	10.8		3.2	1.4	1.2	10.4		1.1	0.2	0.6
11	1		11.8		3.3	1.5	1.2	11.4		1.1	0.2	0.6
12	1		13		3.4	1.7	1.5	12.5		1.1	0.25	0.8
13	1		14.1		3.6	1.8	1.5	13.6		1.1	0.3	0.9
14	1		15.1		3.7	1.9	1.7	14.6		1.1	0.3	0.9
15	1		16.2		3.7	2	1.7	15.7		1.1	0.35	1.1
16	1		17.3		3.8	2	1.7	16.8		1.1	0.4	1.2
17	1		18.3		3.9	2.1	1.7	17.8		1.1	0.4	1.2
18	1		19.5	+0.42 -0.13	4.1	2.2	2	19	+0.13 0 (H11)	1.1	0.5	1.5
19	1		20.5		4.1	2.2	2	20		1.1	0.5	1.5
20	1		21.5		4.2	2.3	2	21		1.1	0.5	1.5
21	1		22.5		4.2	2.4	2	22		1.1	0.5	1.5
22	1		23.5		4.2	2.5	2	23		1.1	0.5	1.5
24	1.2	± 0.05	25.9	+0.42 -0.21	4.4	2.6	2	25.2	+0.21 0 (H12)	1.3	0.6	1.8
25	1.2		26.9		4.5	2.7	2	26.2		1.3	0.6	1.8
26	1.2		27.9		4.7	2.8	2	27.2		1.3	0.6	1.8
28	1.2		30.1	+0.5 -0.25	4.8	2.9	2	29.4	+0.25 0 (H12)	1.3	0.7	2.1
30	1.2		32.1		4.8	3	2	31.4		1.3	0.7	2.1
31	1.2		33.4		5.2	3.2	2.5	32.7		1.3	0.85	2.6
32	1.2		34.4		5.4	3.2	2.5	33.7		1.3	0.85	2.6
34	1.5	± 0.06	36.5		5.4	3.3	2.5	35.7		1.6	0.85	2.6
35	1.5		37.8		5.4	3.4	2.5	37		1.6	1	3
36	1.5		38.8		5.4	3.5	2.5	38		1.6	1	3
37	1.5		39.8		5.5	3.6	2.5	39		1.6	1	3
38	1.5		40.8		5.5	3.7	2.5	40		1.6	1	3
40	1.75		43.5	+0.9 -0.39	5.8	3.9	2.5	42.5	+0.30 0 (H12)	1.85	1.25	3.8
42	1.75		45.5		5.9	4.1	2.5	44.5		1.85	1.25	3.8
45	1.75		48.5		6.2	4.3	2.5	47.5		1.85	1.25	3.8
47	1.75	± 0.07	50.5	+0.1 -0.46	6.4	4.4	2.5	49.5		1.85	1.25	3.8
48	1.75		51.5		6.4	4.5	2.5	50.5		1.85	1.25	3.8
50	2		54.2		6.5	4.6	2.5	53		2.15	1.5	4.5
52	2		56.2		6.7	4.7	2.5	58		2.15	1.5	4.5
55	2		59.2		6.8	5	2.5	58		2.15	1.5	4.5
56	2		62		6.8	5.1	2.5	59		2.15	1.5	4.5
58	2		62.2		6.9	5.2	2.5	61		2.15	1.5	4.5
60	2		65.2		7.3	5.4	2.5	63		2.15	1.5	4.5
62	2		66.2		7.3	5.5	2.5	65		2.15	1.5	4.5
63	2		67.2		7.3	5.6	2.5	66		2.15	1.5	4.5
65	2.5	± 0.07	69.2		7.6	5.8	3	68		2.65	1.5	4.5
68	2.5		72.5		7.8	6.1	3	71		2.65	1.5	4.5
70	2.5		74.5		7.8	6.2	3	73		2.65	1.5	4.5
72	2.5		76.5		7.8	6.4	3	75		2.65	1.5	4.5
75	2.5		79.5		7.8	6.6	3	78		2.65	1.5	4.5

Standard Internal Circlip: IS 3075, DIN 472




shall Dia, d1 Nom. Size	Circlips							Groove				
	s		d3		a	b ^d	d ₅	d2t		mt	t	n
	Size	Tolerrance	Size	Tolerrance	Max.	±	Min.	size	Tolerrance	H13		Min
78	2.5	± 0.06	82.5	+1.3 -0.54	8.5	6.8	3	81	+0.35 0 (H12)	2.85	1.5	4.5
80	2.5		85.5		8.5	7	3	83.5		2.65	1.75	5.3
82	2.5		87.5		8.5	7	3	85.3		2.65	1.75	5.3
85	3	± 0.07	90.5		8.6	7.2	3.5	88.5		3.15	1.75	5.3
88	3		93.5		8.6	7.4	3.5	91.5		3.15	1.75	5.3
90	3		95.5		8.6	7.6	3.5	93.5		3.15	1.75	5.3
92	3		97.5		8.7	7.8	3.5	95.5		3.15	1.75	5.3
95	3		100.5		8.8	8.1	3.5	98.5		3.15	1.75	5.3
98	3		103.5		9	8.3	3.5	101.5		3.15	1.75	5.3
100	3		105.5		9.2	8.4	3.5	103.5		3.15	1.75	5.3
102	4	± 0.08	108		9.5	8.5	3.5	106	+0.54 0 (H13)	4.15	2	6
105	4		112		9.5	8.7	3.5	109		4.15	2	6
108	4		115		9.5	8.9	3.5	112		4.15	2	6
110	4		117		10.4	9	3.5	114		4.15	2	6
112	4		119		10.5	9.1	3.5	116		4.15	2	6
115	4		122	+1.5 -0.63	11	9.3	3.5	119	+0.63 0 (H13)	4.15	2	6
120	4		127		11	9.7	3.5	124		4.15	2	6
125	4		132		11	10	4	129		4.15	2	6
130	4		137		11.2	10.2	4	134		4.15	2	6
135	4		142		11.2	10.5	4	139		4.15	2	6
140	4		147		11.4	10.7	4	144		4.15	2	6
145	4		152		12	10.9	4	149		4.15	2	6
150	4		158		12	11.2	4	155		4.15	2	7.5
155	4		164		13	11.4	4	160		4.15	2.5	7.5
160	4		169		13	11.6	4	165		4.15	2.5	7.5
165	4	± 0.09	174.5		13.5	11.8	4	170	+0.72 0 (H13)	4.15	2.5	7.5
170	4		179.5		13.5	12.2	4	175		4.15	2.5	7.5
175	4		184.5	+1.70 -.072	14.2	12.7	4	180		4.15	2.5	7.5
180	4		189.5		14.2	13.2	4	185		4.15	2.5	7.5
185	4		194.5		14.2	13.7	4	190		4.15	2.5	7.5
190	4		199.5		14.2	13.8	4	195		4.15	2.5	7.5
195	4		204.5		14.2	13.8	4	200		4.15	2.5	7.5
200	4		209.5		14.2	14	4	205		4.15	2.5	7.5
210	5		222	+2.0 -0.81	14.2	14	4	216	+0.81 0 (H13)	5.15	3	9
220	5		232		14.2	14	4	226		5.15	3	9
230	5		242		14.2	14	4	236		5.15	3	9
240	5		252		14.2	14	4	246		5.15	3	9
250	5		262		14.2	14	4	256		5.15	3	9
260	5		275		16.2	16	5	268		5.15	4	12
270	5		285		16.2	16	5	278		5.15	4	12
280	5		295		16.2	16	5	288		5.15	4	12
290	5		305		16.2	16	5	298		5.15	4	12
300	5		315		16.2	16	5	308		5.15	4	12

Standard Internal Circlip Heavy Type: IS 3075



shall Dia, d1 Nom. Size	Circlips							Groove				
	s		d3		a	b ^d	d ₅	d2t		mt	t	n
	Size	Tolerance	Size	Tolerance	Max.	$\bar{b}$	Min.	size	Tolerance	H13		Min
20	1.5	± 0.05	21.5	+0.42 -0.21	4.5	2.4	2	21	+0.13 0 (H11)	1.6	0.5	1.5
22	1.5		23.5		4.7	4.8	2	23		1.6	0.5	1.5
24	1.5		25.9		4.9	3	2	25.2		1.6	0.6	1.8
25	1.5		26.9		5	3.1	2	26.2	+0.21 0 (H12)	1.6	0.6	1.8
26	1.5		27.9		5.1	3.1	2	27.2		1.6	0.6	1.8
28	1.5		30.1	+0.50 -0.25	5.3	3.2	2	29.4	+0.25 0 (H12)	1.6	0.7	2.1
30	1.5		32.1		5.5	3.3	2	31.4		1.6	0.7	2.1
32	1.5		34.4		5.7	3.4	2	33.7		1.6	0.85	2.6
34	1.75		36.5		5.9	3.7	2.5	35.7		1.85	0.85	2.6
35	1.75		37.8		6	3.8	2.5	37		1.85	1	3
37	1.75		39.8		6.2	3.9	2.5	39		1.85	1	3
38	1.75		40.8		6.3	3.9	2.5	40		1.85	1	3
40	2	± 0.06	43.5	+0.90 -0.39	6.5	3.9	2.5	42.5		2.15	1.25	3.8
42	2		45.5		6.7	4.1	2.5	44.5		2.15	1.25	3.8
45	2		48.5		7	4.3	2.5	47.5		2.15	1.25	3.8
47	2		50.5	+1.10 -0.46	7.2	4.4	2.5	49.5		2.15	1.25	3.8
50	2.5		54.2		7.5	4.6	2.5	53	+0.30 0 (H12)	2.65	1.5	4.5
52	2.5		56.2		7.7	4.7	2.5	55		2.65	1.5	4.5
55	2.5		59.2		8	5	2.5	58		2.65	1.5	4.5
60	3	± 0.07	64.2		8.5	5.4	2.5	63		3.15	1.5	4.5
62	3		66.2		8.6	5.5	2.5	65		3.15	1.5	4.5
65	3		69.2		8.7	5.8	3	68		3.15	1.5	4.5
68	3		72.5		8.8	6.1	3	71		3.15	1.5	4.5
70	3		74.5		9	6.2	3	73		3.15	1.5	4.5
72	3		76.5		9.2	6.4	3	75		3.15	1.5	4.5
75	3		79.5		9.3	6.6	3	78		3.15	1.5	4.5
80	4	± 0.08	85.5	+1.30 -0.54	9.5	7	3	83.5	+0.35 0 (H12)	4.15	1.75	5.3
85	4		90.5		9.7	7.2	3.5	83.5		4.15	1.75	5.3
90	4		95.5		10	7.8	3.5	93.5		4.15	1.75	5.3
95	4		100.5		10.3	8.1	3.5	98.5		4.15	1.75	5.3
100	4		105.5		10.5	8.4	3.5	103.5		4.15	1.75	5.3

Inverted Internal Circlip – J Type – DIN 5008, M1308

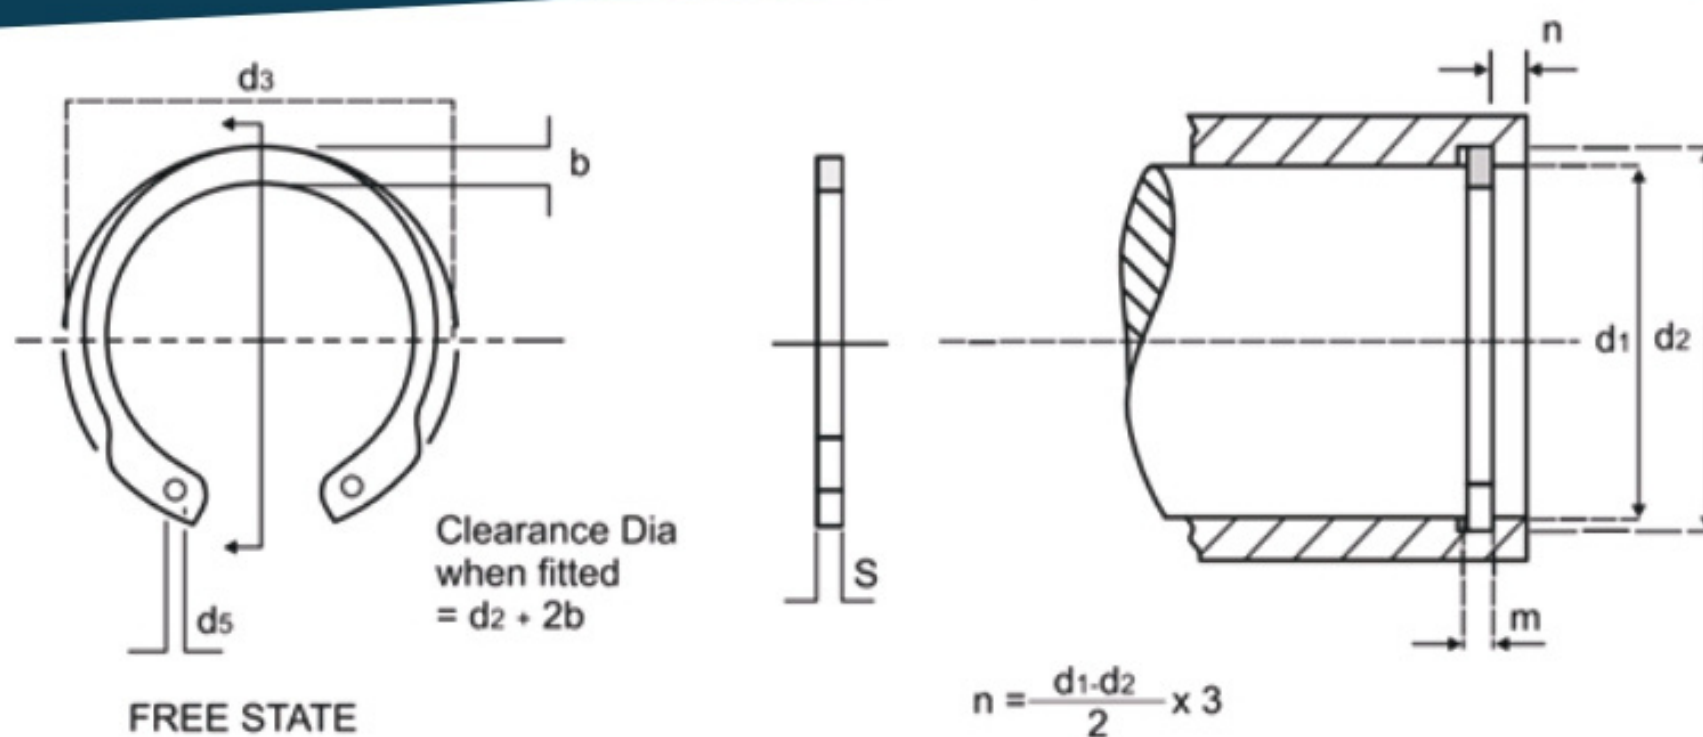


Material: Type: Carbon Spring Steel
Hardness: d1 - 16 to 47 : 47 to 54 HRC
d1 > 48 : 44 to 51 HRC

Finish: Phosphating or as per requirements

Circlip Dimensions								Groove Dimensions			
Nominal Diameter (d1)	Thickness (s)	Tolerance	Unstressed Diameter d3	Tolerance	Beam (b)	Lug Hole (d5) min	Weight kg/1000	Groove Diameter (d2)	Tolerance	Groove Width (m)	Radial depth of Groove (t)
12	0.60	-0.05	13.1	+0.42-0.13	1.8	1.0	0.25	12.6	+0.11	0.70	0.30
15	0.80	-0.05	16.1		2.0	1.0	0.41	15.7		0.90	0.35
16	1.00	-0.06	17.3		2.1	1.3	0.53	16.8		1.10	0.40
17	1.00	-0.06	18.3		2.1	1.3	0.58	17.8		1.10	0.40
18	1.00	-0.06	19.5		2.2	1.3	0.62	19.0	+0.15	1.10	0.50
19	1.00	-0.06	20.5		2.2	1.3	0.66	20.0		1.10	0.50
20	1.00	-0.06	21.5		2.3	1.3	0.80	21.0		1.10	0.50
21	1.00	-0.06	22.5		2.4	1.3	0.81	22.0		1.10	0.50
22	1.00	-0.06	23.5	+0.42-0.21	2.4	1.3	0.83	23.0	+0.21	1.10	0.50
24	1.20	-0.06	25.9		2.8	1.5	1.30	25.2		1.30	0.50
25	1.20	-0.06	26.9		2.8	1.5	1.40	26.2		1.30	0.60
26	1.20	-0.06	27.9		3.0	1.5	1.50	27.2		1.30	0.60
27	1.20	-0.06	29.1		3.0	1.5	1.53	28.4		1.30	0.60
28	1.20	-0.06	30.1		3.1	1.5	1.80	29.4	+0.25	1.30	0.70
30	1.20	-0.06	32.1		3.2	1.5	2.03	30.4		1.30	0.70
32	1.20	-0.06	34.4		3.3	1.5	2.05	33.7		1.30	0.85
33	1.20	-0.06	35.5		3.3	1.5	2.35	34.7		1.30	1.00
35	1.50	-0.06	37.8	+0.50-0.25	3.4	1.7	3.20	37.0		1.60	1.00
36	1.50	-0.06	38.8		3.6	1.7	3.23	38.0		1.60	1.00
38	1.50	-0.06	40.8		3.8	1.7	3.68	40.0		1.60	1.00
40	1.75	-0.06	43.5		4.2	2.0	4.75	42.5		1.85	1.25
42	1.75	-0.06	45.5	+0.90-0.39	4.2	2.0	5.20	44.5	+0.30	1.85	1.25
45	1.75	-0.06	48.5		4.2	2.0	6.00	47.5		1.85	1.25
47	1.75	-0.06	50.5		4.7	2.0	6.50	49.5		1.85	1.25
48	1.75	-0.06	51.5		4.7	2.0	7.00	50.5		1.85	1.25
50	2.00	-0.07	54.2	+1.10-0.46	5.2	2.5	8.50	53.0		2.15	1.50
52	2.00	-0.07	56.2		5.2	2.5	9.00	55.0		2.15	1.50
55	2.00	-0.07	59.2		5.2	2.5	10.00	58.0		2.15	1.50
57	2.00	-0.07	61.2		5.2	2.5	10.25	60.0		2.15	1.50
58	2.00	-0.07	62.2		5.2	2.5	10.50	61.0		2.15	1.50
60	2.00	-0.07	64.2		5.2	2.5	11.25	63.0		2.15	1.50
62	2.00	-0.07	66.2		5.2	2.5	11.75	65.0		2.15	1.50
65	2.50	-0.07	69.2		5.7	2.5	16.25	68.0		2.65	1.50
67	2.50	-0.07	71.5		5.7	2.5	17.30	70.0		2.65	1.50
68	2.50	-0.07	72.5		5.7	2.5	17.75	71.0		2.65	1.50
72	2.50	-0.07	76.5	+1.30-0.54	6.0	2.58	19.60	75.0	+0.35	2.65	1.50
80	2.50	-0.07	85.5		6.0	2.5	22.90	83.5		2.65	1.75
85	3.00	-0.08	90.5		6.6	3.0	30.00	88.5		3.15	1.75
90	3.00	-0.08	95.5		6.6	3.0	33.00	93.5		3.15	1.75
95	3.00	-0.08	100.5		7.4	3.0	37.50	98.5		3.15	1.75
100	3.00	-0.08	105.5		7.4	3.0	41.90	103.5		3.15	1.75


Inverted Internal Circlip – J Type – DIN 5008, M1308

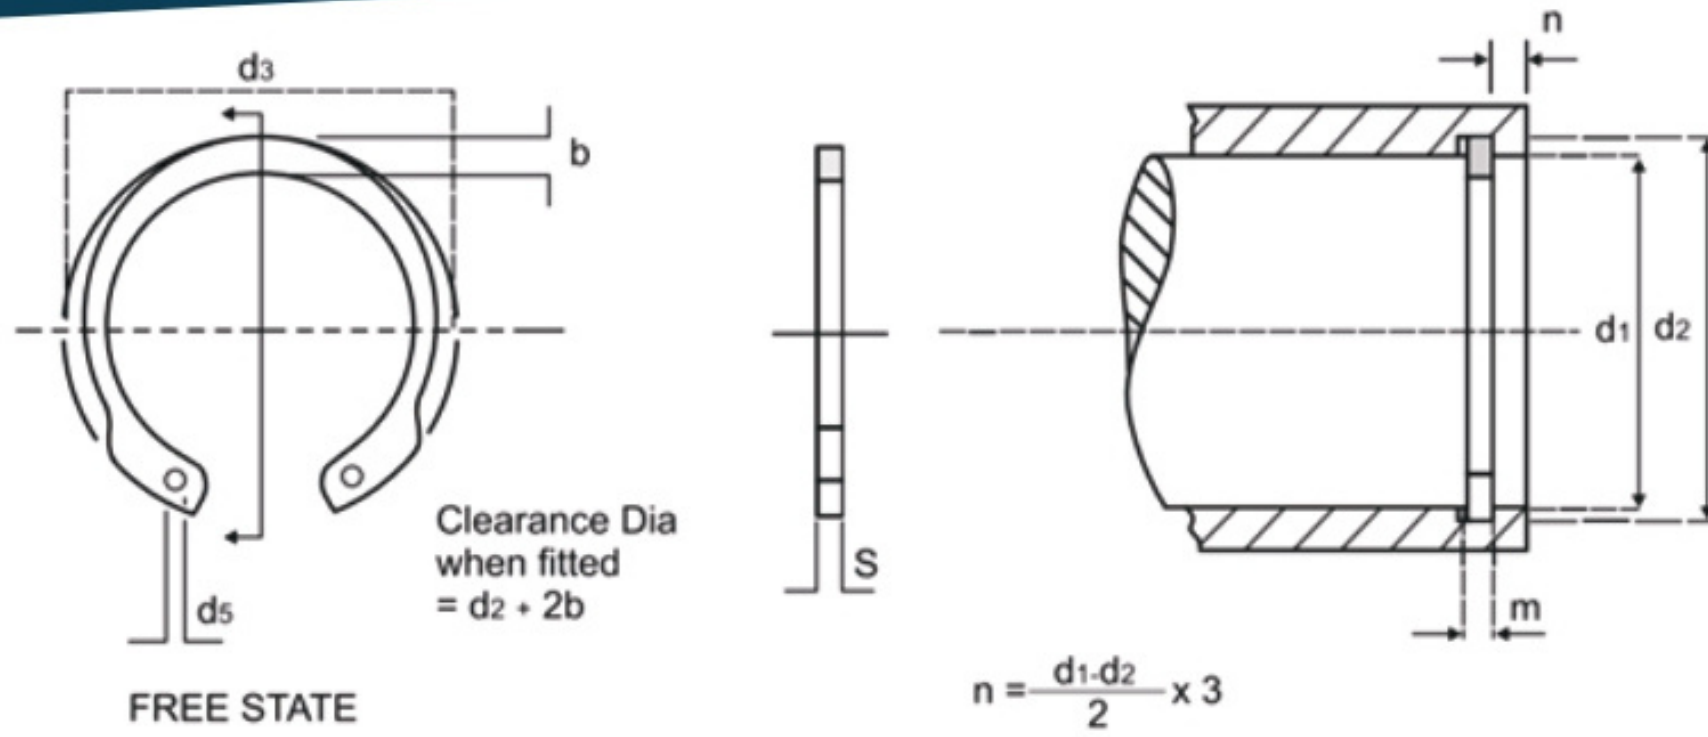

Material: Type: Carbon Spring Steel
Hardness: d1 - 16 to 47mm : 47 to 54 HRC
d1 > 48mm : 44 to 51 HRC

Finish: Phosphating or as per requirements


Circlip Dimensions								Groove Dimensions			
Nominal Diameter (d1)	Thickness (s)	Tolerance	Unstressed Diameter d3	Tolerance	Beam (b)	Lug Hole (d5) min	Weight kg/1000	Groove Diameter (d2)	Tolerance	Groove Width (m)	Radial depth of Groove (t)
12	0.60	-0.05	13.1	+0.42-0.13	1.8	1.0	0.25	12.6	+0.11	0.70	0.30
15	0.80		16.1		2.0	1.0	0.41	15.7		0.90	0.35
16	1.00		17.3		2.1	1.3	0.53	16.8		1.10	0.40
17	1.00		18.3		2.1	1.3	0.58	17.8		1.10	0.40
18	1.00	-0.06	19.5		2.2	1.3	0.62	19.0	+0.15	1.10	0.50
19	1.00		20.5		2.2	1.3	0.66	20.0		1.10	0.50
20	1.00		21.5		2.3	1.3	0.80	21.0		1.10	0.50
21	1.00		22.5		2.4	1.3	0.81	22.0		1.10	0.50
22	1.00		23.5		2.4	1.3	0.83	23.0	+0.21	1.10	0.50
24	1.20		25.9		2.8	1.5	1.30	25.2		1.30	0.50
25	1.20		26.9		2.8	1.5	1.40	26.2		1.30	0.60
26	1.20		27.9		3.0	1.5	1.50	27.2		1.30	0.60
27	1.20		29.1		3.0	1.5	1.53	28.4		1.30	0.60
28	1.20		30.1	+0.42-0.21	3.1	1.5	1.80	29.4	+0.25	1.30	0.70
30	1.20		32.1		3.2	1.5	2.03	30.4		1.30	0.70
32	1.20		34.4		3.3	1.5	2.05	33.7		1.30	0.85
33	1.20		35.5		3.3	1.5	2.35	34.7		1.30	1.00
35	1.50		37.8	+0.50-0.25	3.4	1.7	3.20	37.0		1.60	1.00
36	1.50		38.8		3.6	1.7	3.23	38.0		1.60	1.00
38	1.50		40.8		3.8	1.7	3.68	40.0		1.60	1.00
40	1.75		43.5		4.2	2.0	4.75	42.5		1.85	1.25
42	1.75	-0.07	45.5	+0.90-0.39	4.2	2.0	5.20	44.5	+0.30	1.85	1.25
45	1.75		48.5		4.2	2.0	6.00	47.5		1.85	1.25
47	1.75		50.5		4.7	2.0	6.50	49.5		1.85	1.25
48	1.75		51.5		4.7	2.0	7.00	50.5		1.85	1.25
50	2.00		54.2	+1.10-0.46	5.2	2.5	8.50	53.0		2.15	1.50
52	2.00		56.2		5.2	2.5	9.00	55.0		2.15	1.50
55	2.00		59.2		5.2	2.5	10.00	58.0		2.15	1.50
57	2.00		61.2		5.2	2.5	10.25	60.0		2.15	1.50
58	2.00		62.2		5.2	2.5	10.50	61.0		2.15	1.50
60	2.00		64.2		5.2	2.5	11.25	63.0		2.15	1.50
62	2.00		66.2		5.2	2.5	11.75	65.0		2.15	1.50
65	2.50		69.2		5.7	2.5	16.25	68.0	+0.35	2.65	1.50
67	2.50	-0.07	71.5	+1.30-0.54	5.7	2.5	17.30	70.0		2.65	1.50
68	2.50		72.5		5.7	2.5	17.75	71.0		2.65	1.50
72	2.50		76.5		6.0	2.58	19.60	75.0		2.65	1.50
80	2.50		85.5		6.0	2.5	22.90	83.5		2.65	1.75
85	3.00		90.5		6.6	3.0	30.00	88.5		3.15	1.75
90	3.00		95.5		6.6	3.0	33.00	93.5		3.15	1.75
95	3.00		100.5		7.4	3.0	37.50	98.5		3.15	1.75
100	3.00		105.5		7.4	3.0	41.90	103.5		3.15	1.75

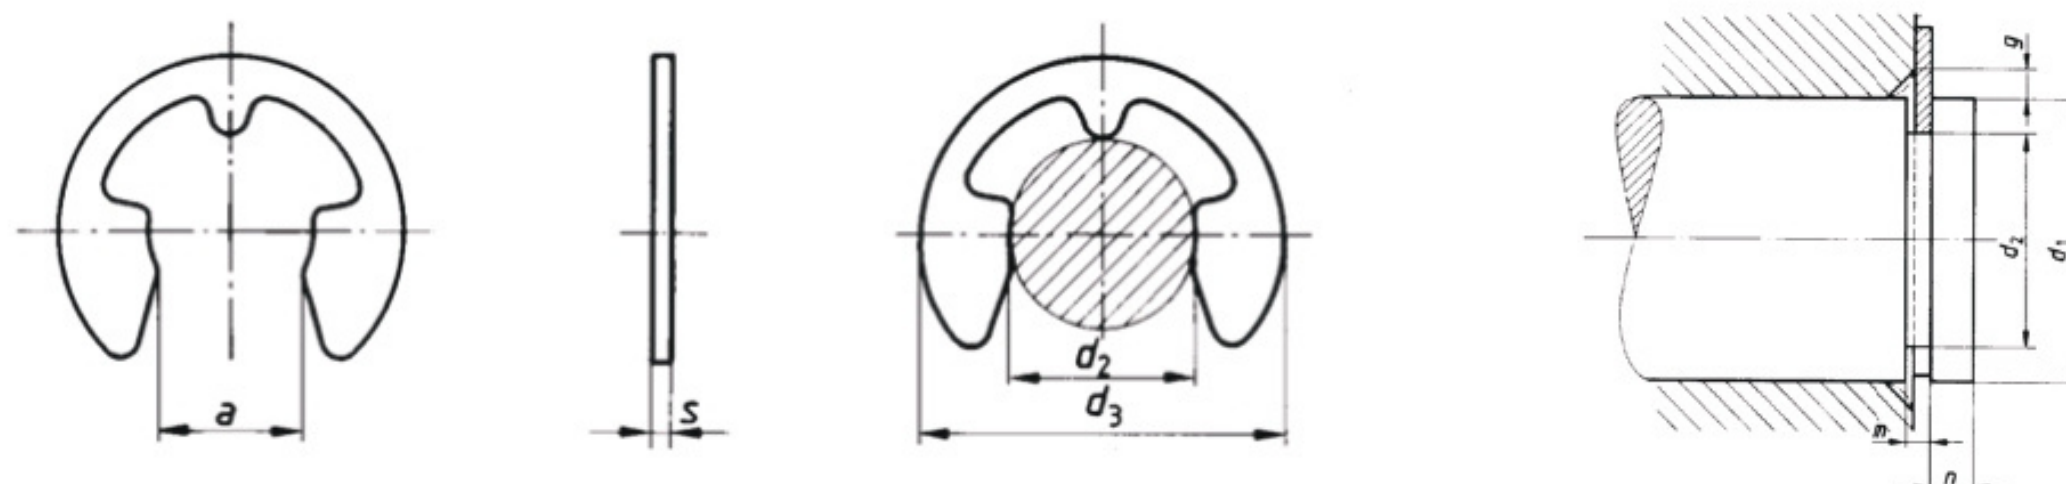

Material: Carbon Spring Steel
Hardness: 46 – 54 HRC

Finish: Phosphating or as per requirements

Groove Dia, d1 Nominal Size	Shaft Dia Range, d1		Circlip				Groove				
			s		a		d2		m*		n min
	From	To	Size	Tole- rance	Size	Tole- rance	Size	Tole- rance	Size	Tole- rance	
0.8	1	1.4	0.2	±0.02	0.58	±0.04	0.8	0 -0.06	0.24	+0.04 0	0.4
1.2	1.4	2	0.3		1.01		1.2		0.34		0.6
1.5	2	2.5	0.4		1.28		1.5		0.44		0.8
1.9	2.5	3	0.5	±0.03	1.61	±0.048	1.9	0 -0.075	0.54	+0.05 0	1
2.3	3	4	0.6		1.94		2.3		0.64		1
3.2	4	5	0.7		2.70		3.2		0.64		1
4	5	7	0.7		3.34		4		0.74		1.2
5	6	8	0.7		4.11		5		0.74		1.2
6	7	9	0.7	±0.04	5.26	±0.058	6	0 -0.09	0.74	+0.08 0	1.2
7	8	11	0.9		5.84		7		0.94		1.5
8	9	12	1		6.52		8		1.05		1.8
9	10	14	1.1		7.63		9		1.15		2
10	11	15	1.2	±0.05	8.32	±0.07	10	0 -0.11	1.25	+0.08 0	2
12	13	18	1.3		10.45		12		1.35		2.5
15	16	24	1.5		12.61		15		1.55		3
19	20	31	1.75	±0.06	15.92	±0.084	19	0 -0.13	1.80	+0.08 0	3.5
24	25	38	2		21.88		24		2.05		4
30	32	42	2.5		25.88		30		2.55		4.5

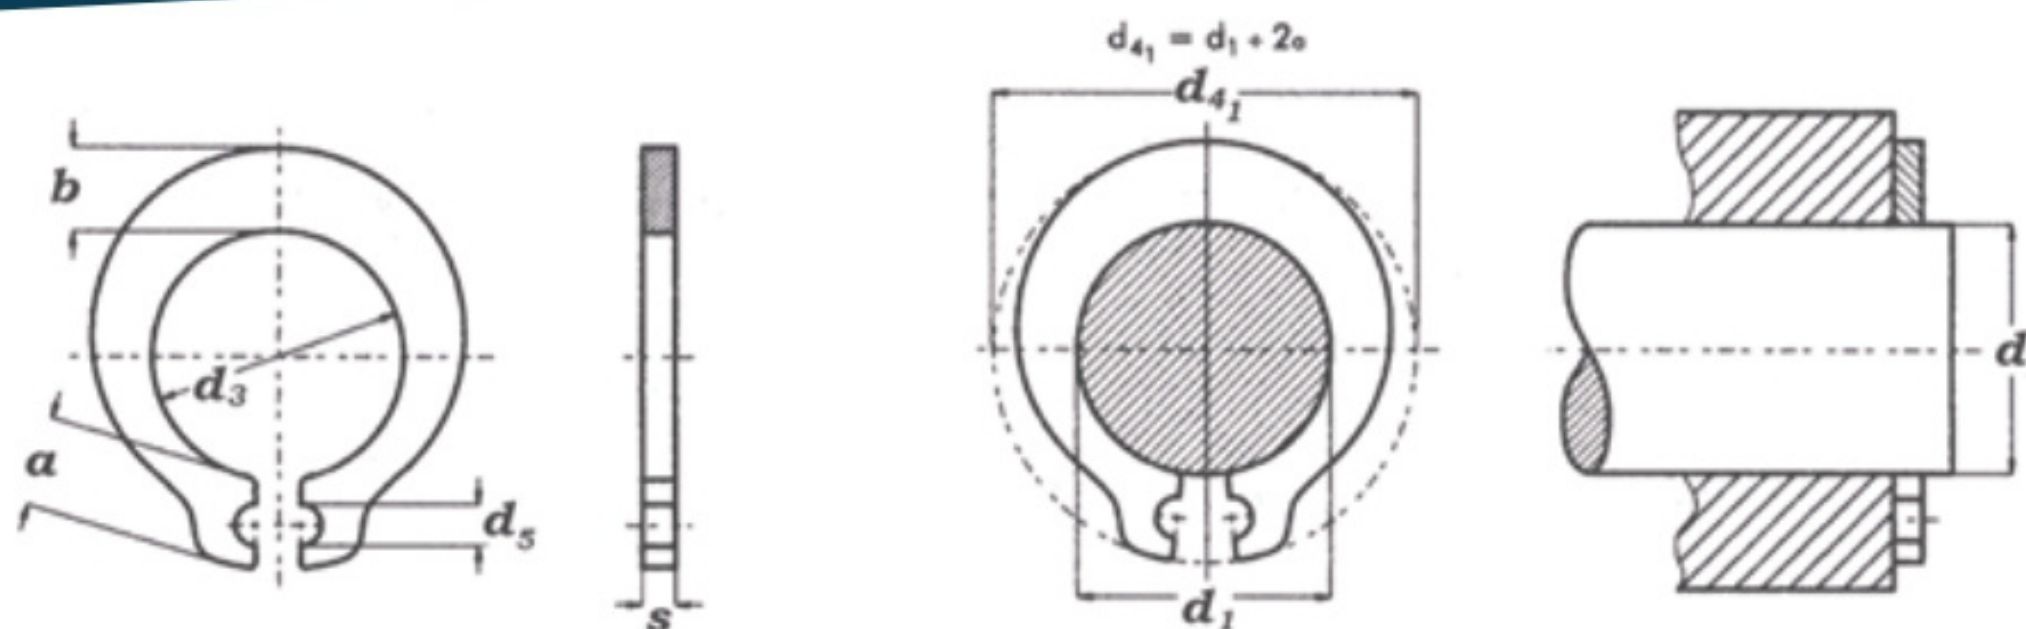


Material: Carbon Spring Steel

Finish: Phosphating or as per requirements

Hardness:

Nominal Diameter (d1)	Thickness (s)	Unstressed Diameter (d3)	Tolerance	Lug (a) max	Beam (b)	Lug Hole (d5) Min	Diameter During Assembly Over Nominal Diameter (d4 ₁)
1.5	0.40	1.40	±0.020	1.7	0.7	0.9	5.1
2.0	0.60	1.90		1.9	1.0	0.9	6.0
2.2	0.60	2.05	±0.025	1.9	1.1	0.9	6.2
2.8	0.60	2.35	±0.030	1.9	1.2	0.9	6.5
3.0	0.60	2.65	±0.035	2.0	1.3	0.9	7.0
3.5	0.60	2.85	±0.040	2.1	1.4	0.9	7.4
4.0	0.60	3.30	±0.050	2.3	1.6	0.9	8.3
4.5	0.80	3.80	±0.060	2.7	1.8	1.2	9.6
5.0	0.80	4.25		2.9	2.0	1.3	10.5
5.5	0.80	4.75	±0.075	2.9	2.2	1.3	11.0
6.0	0.80	5.20		3.0	2.2	1.3	11.7
7.0	1.00	5.70		3.2	2.4	1.4	12.6
8.0	1.00	6.70	±0.090	3.4	2.7	1.4	14.0
9.0	1.00	7.70		3.5	3.0	1.4	15.2
10.0	1.20	8.65		4.7	3.5	2.0	18.6
10.5	1.20	9.65		4.7	3.8	2.0	19.6
11.0	1.20	10.20	±0.110	4.8	4.2	1.5	18.7
12.0	1.20	10.60		4.8	4.6	2.0	20.8
13.0	1.20	11.60		5.3	5.0	2.0	21.8
13.8	1.20	12.55		5.1	5.4	2.2	23.8
14.0	1.50	13.50		5.1	5.4	2.2	24.8
15.0	1.50	14.50		5.1	5.6	2.2	25.0
16.0	1.50	15.40		5.6	5.8	2.5	26.4

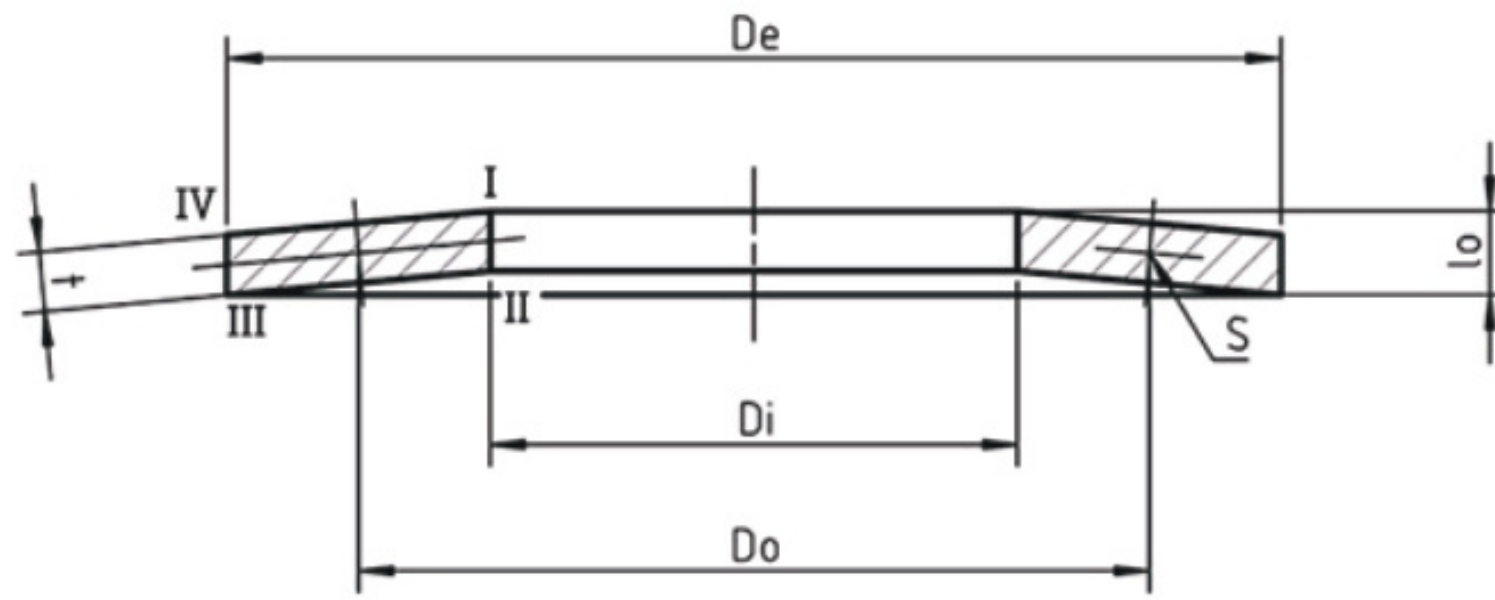

Material: Carbon Spring Steel
Hardness: 42 to 52HRC


Finish: Phosphating

Heavy Pattern

Group	De(h1)	DI(h1)	t or (t')	Tolerance	h _o	l _o	Tolerance
1	8	4.2	0.4	+0.02-0.06	0.2	0.6	+0.02
	10	5.2	0.5		0.25	0.75	+0.03
	12.5	6.2	0.7	+0.03-0.09	0.3	1	
	14	7.2	0.8		0.3	1.1	
	16	8.2	0.9		0.35	1.25	
	18	9.2	1		0.4	1.4	+0.04
2	20	10.2	1.1	+0.04-0.12	0.45	1.55	
	22.5	11.2	1.25		0.5	1.75	
	25	12.2	1.5		0.55	2.05	
	28	14.2	1.5		0.65	2.15	
	31.5	16.3	1.75		0.7	2.45	
	35.5	18.3	2		0.8	2.8	
	40	20.43	2.25		0.9	3.15	
	45	22.4	2.5		1	3.5	+0.05
	50	25.4	3	+0.05-0.15	1.1	4.1	
	56	28.5	3		1.3	4.3	
	63	31	3.5		1.4	4.9	
	71	36	4		1.6	5.6	
	80	41	5		1.7	6.7	+0.10
	90	46	5		2	7	
	100	51	6		2.2	8.2	
	112	57	6		2.5	8.5	
3	125	64	8(7.5)	±0.10	2.6	10.6	
	140	72	8(7.5)		3.2	11.2	
	160	82	10(9.4)		3.5	13.5	
	180	92	10(9.4)		4	14	
	200	102	12(11.25)		4.2	16.2	
	225	112	12(11.25)		5	17	
	250	127	14(13.1)		5.6	19.6	

Light Pattern

Group	De(h1)	D1(H12)	t or (t ⁺)	Tolerance	h _o	l _o	Tolerance
1	8	4.2	0.3	+0.10-0.05	0.25	0.55	+0.10
	10	5.2	0.4		0.3	0.7	
	12.5	6.2	0.5		0.35	0.85	
	14	7.2	0.5		0.4	0.9	
	16	8.2	0.6		0.45	1.05	
	18	9.2	0.7		0.5	1.2	
2	20	10.2	0.8	+0.10-0.05	0.55	1.35	+0.15
	22.5	11.2	0.8		0.65	1.45	
	25	12.2	0.9		0.7	1.6	
	28	14.2	1		0.8	1.8	
	31.5	16.3	1.25	+0.15-0.08	0.9	2.15	+0.20
	35.5	18.3	1.25		1	2.25	
	40	20.4	1.5		1.15	2.65	
	45	22.4	1.75		1.	3.05	
	50	25.4	2		1.4	3.4	+0.25
	56	28.5	2	+0.20-0.10	1.6	3.6	
	63	31	2.5		1.75	4.25	
	71	36	2.5		2.3	4.5	
	80	41	3		2.5	5.3	
	90	46	3.5	+0.30-0.15	2.8	6	+0.30
	100	51	3.5		3.2	6.3	
3	112	57	4		3.5	7.2	
	125	64	5		4	8.5	
	140	72	5	±0.30	4.5	10.5	
	160	82	6		5.1	11.1	
	180	92	6				
	200	102	8(7.5)		5.6	13.6	
	225	112	8(7.5)		6.5	14.5	
	250	127	10(94)		7	17	

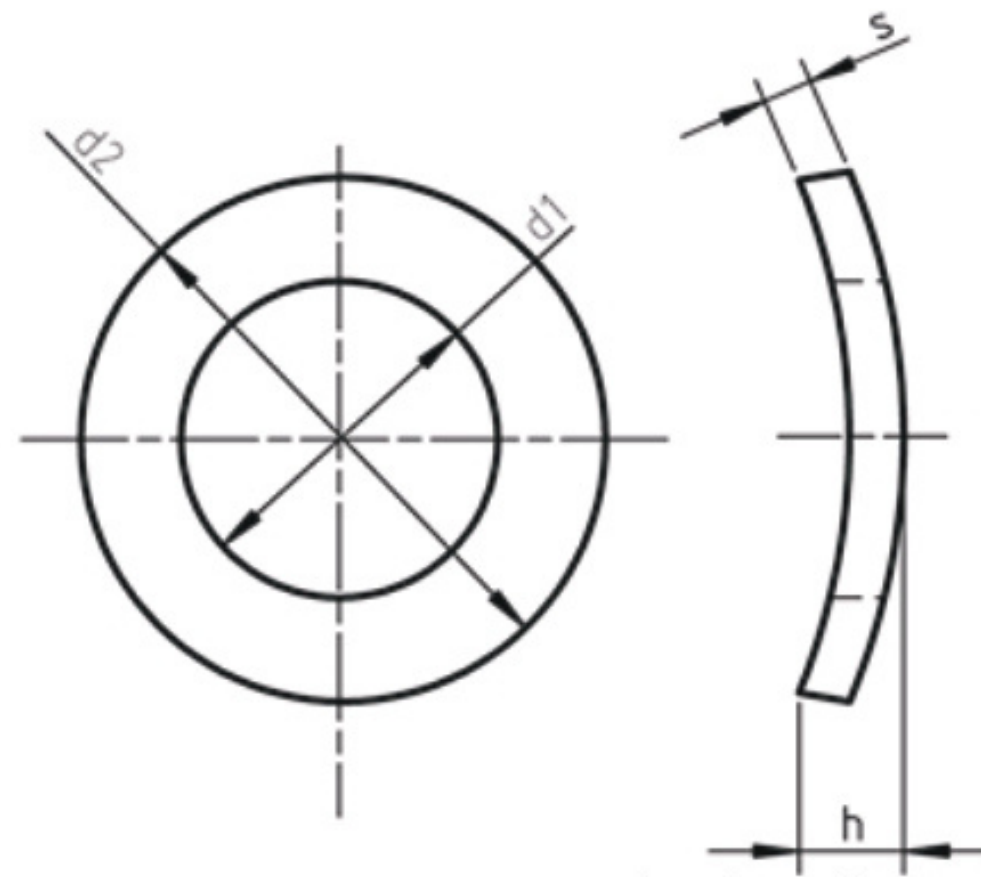


Material: Carbon Spring Steel
Hardness: 42 to 50 HRC

Finish: Phosphating or as per requirements

Type A


Nominal size	s		d1	d2	h		for size
	Nominal size	tol	H14	js15	min.	max.	
3	0.5	+0.05	3.2	8	0.8	1.6	M3
3.5	0.5		3.7	8	0.9	1.8	M3.5
4	0.5		4.3	9	1	2	M4
5	0.5		5.3	11	1.1	2.2	M5
6	0.5		6.4	12	1.3	2.6	M6
7	0.8	+0.06	7.4	14	1.5	3	M7
8	0.8		8.4	15	1.5	3	M8
10	1	+0.07	10.5	21	2.1	4.2	M10
12	1.2		13	24	2.5	5	M12
14	1.6	+0.08	15	28	3	6	M14
16	1.6		17	30	3.2	6.4	M16
18	1.6		19	34	3.3	6.6	M18
20	1.6		21	36	3.7	7.4	M20
22	1.8	+0.1	23	40	3.9	7.8	M22
24	1.8		25	44	4.1	8.2	M24
27	2		28	50	4.7	9.4	M27
30	2.2		31	56	5	10	M30
33	2.2		34	60	5.3	10.6	M33

Type B

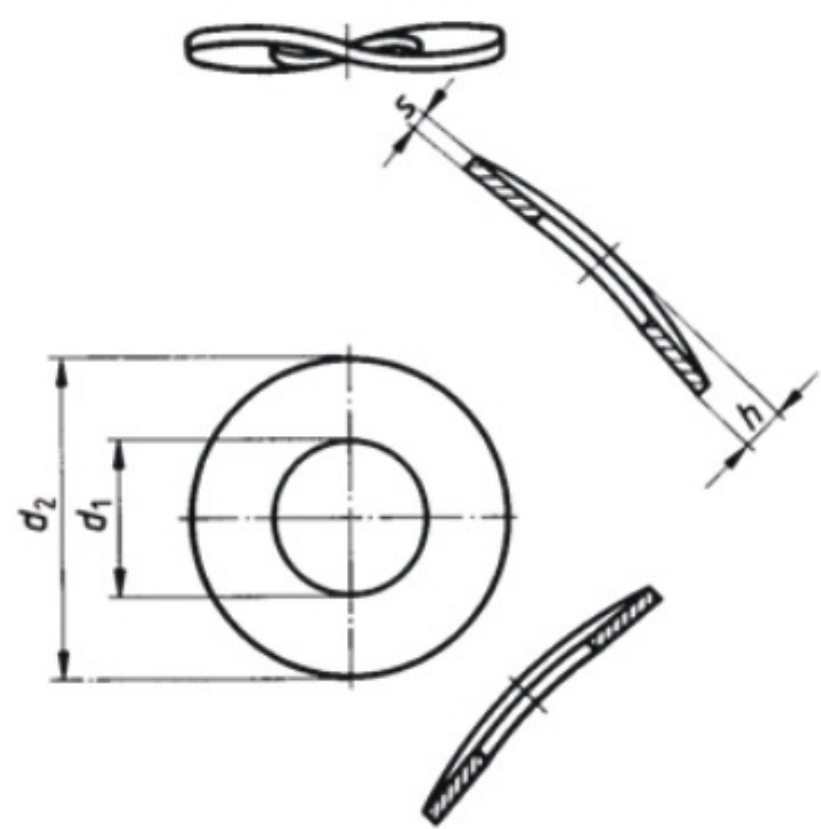


Nom. Size	s		d1 H14	d2 js16	h		for Size
	Nom. Size	Tolerance			min.	max.	
3	0.5	+0.05	3.2	8	0.8	1.6	M3
3.5	0.5		3.7	8	0.9	1.8	M3.5
4	0.5		4.3	9	1	2	M4
5	0.5		5.3	11	1.1	2.2	M5
6	0.5		6.4	12	1.3	2.6	M6
7	0.8	+0.06	7.4	14	1.5	3	M7
8	0.8		8.4	15	1.5	3	M8
10	1	+0.07	10.5	21	2.1	4.2	M10
12	1.2		13	24	2.5	5	M12
14	1.6	+0.08	15	28	3	6	M14
16	1.6		17	30	3.2	6.4	M16
18	1.6		19	34	3.3	6.6	M18
20	1.6		21	36	3.7	7.4	M20
22	1.8	+0.01	23	40	3.9	7.8	M22
24	2		25	44	4.1	8.2	M24
27	2		28	50	4.7	9.4	M27
30	2.2		31	56	5	10	M30
33	2		34	60	5.3	10.6	M33
36	2.5		37	68	5.8	11.6	M36

Spring Dowel Sleeves (Light Pattern) – IS 5988, DIN 1481

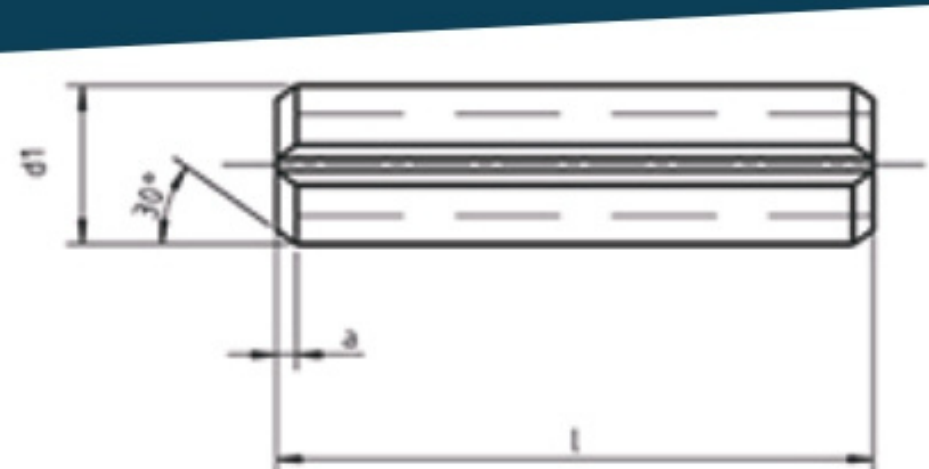

Up to 4.5mm Nominal Diameter

Material: Carbon Spring Steel
Hardness: 45 – 50 HRC

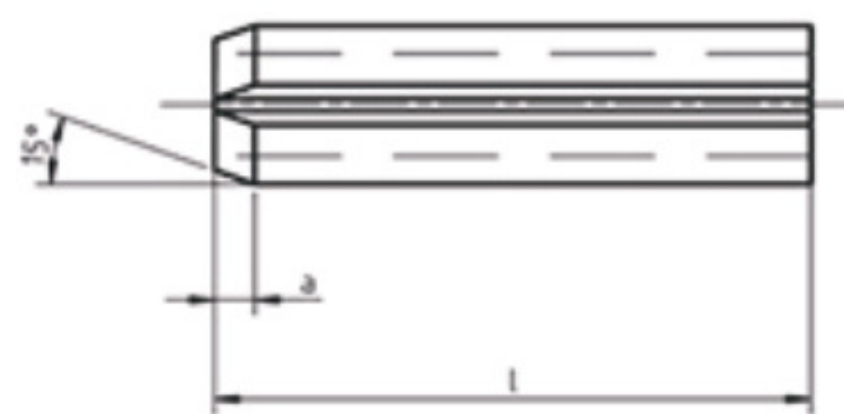

Nominal Diameter 5mm and above

Finish: Phosphating

Light Pattern

Nominal Diameter mm	s	a	d1	Tolerance on d1	d1 ≈	For Bolt Size	Corresponding Washer	Preferred on Length
2	0.2	0.35	2.3	+0.1	1.9	-	-	4-30
2.5	0.25	0.45	2.8		2.3	-	-	4-30
3	0.3	0.5	3.3		2.7	-	-	4-40
3.5	0.35	0.6	3.3	+0.2	3.1	-	-	4-40
4	0.5	0.7	4.4		3.4	-	-	4-50
4.5	0.5	0.8	4.8		3.8	M3	3.2	4-50
5	0.5	1.6	5.4		4.4	-	-	5-50
6	0.75	1.6	6.4		4.9	M4	4.3	10-100
7	0.75	1.6	7.5	+0.3	6.0	M5	5.3	10-100
8	0.75	2	8.5		7.0	M6	6.4	10-120
10	1	2	10.5		8.5	-	-	10-150
11	1	2	11.5	+0.4	9.5	M8	8.4	10-150
12	1	2	12.5		10.5	-	-	10-180
13	1.25	2	13.5		11.0	M10	10.5	10-180
14	1.5	2	14.5		11.5	-	13	10-200
16	1.75	2	16.5		13.5	M12	15	10-200
18	2	2	18.5		16.5	-	-	10-200
20	2	2	20.5		16.5	M13	17	14-200
21	2	3	21.5		19.5	M18	19	14-200
23	2	3	23.5		21.5	M20	21	14-200
25	2.5	3	25.5		23.5	M22	23	14-200
30	2.5	3	28.5		25.5	M24	25	14-200
35	3.5	3	30.5		28.5	M27	28	20-200
40	4	4	35.5		32.5	M30	31	20-200
45	4	4	40.5		37.5	M36	37	20-200
50	5	4	50.5		40.5	M30	40	20-200

Heavy Pattern



Nominal Diameter	S	a	d1	Tolerance on d1	d1 ≈	For Bolt Size	Corresponding Washer	Preferred on Length
1	0.2	0.15	1.2	+0.1	0.8	-	-	4-30
1.5	0.3	0.25	1.7		1.1	-	-	4-30
2	0.4	0.35	2.3		1.5	-	-	4-40
2.5	0.5	0.45	2.8		1.8	-	-	4-40
3	0.6	0.	3.3	+0.2	2.1	-	-	4-50
3.5	0.75	5	4.8		2.3	-	3.2	4-50
4	0.8	0.6	4.4		2.8	-	-	5-50
4.5	1	0.7	4.9		2.9	-	4.3	10-100
5	1	0.8	5.4		3.4	-	5.3	10-100
6	1.25	1.6	6.4	+0.3	3.9	-	6.4	10-120
8	2	1.6	8.5		5.5	M3	-	10-150
10	2.5	2	10.5		6.5	M4	8.4	10-150
12	2.5	2	12.5		7.5	M5	-	10-180
13	3	2	13.5		8.5	M6	10.5	10-180
14	3	2	14.5		10.5	-	13	10-200
16	3.5	2	16.5		11.5	-	15	10-200
20	4	2	18.5	+0.4	12.5	M8	-	10-200
21	4	3	20.5		13.5	M10	17	14-200
25	5	3	21.5		15.5	-	19	14-200
28	5.5	3	25.5		17.5	M12	21	14-200
30	6	3	28.8		18.5	M14	23	14-200
32	6	3	30.5		20.5	M16	25	14-200
35	7	3	32.5		21.5	M20	28	20-200
38	7.5	4	38.5		23.5	M22	31	20-200
40	7.5	4	40.5		25.5	M24	37	20-200
45	8.5	4	45.5		28.5	M27	40	20-200
50	9.5	4	50.5		31.5	M30		

PREFERRED ON LENGHTS

Length mm	In Steps of mm
4 to 6	1
6 to 32	2
32 to 40	4
40 to 100	5
100 to 200	20

TOLERANCES ON LENGHTS

Length mm	Tolerance mm
4 to 10	+0.5
12 to 50	+1.0
50 to 200	+1.5

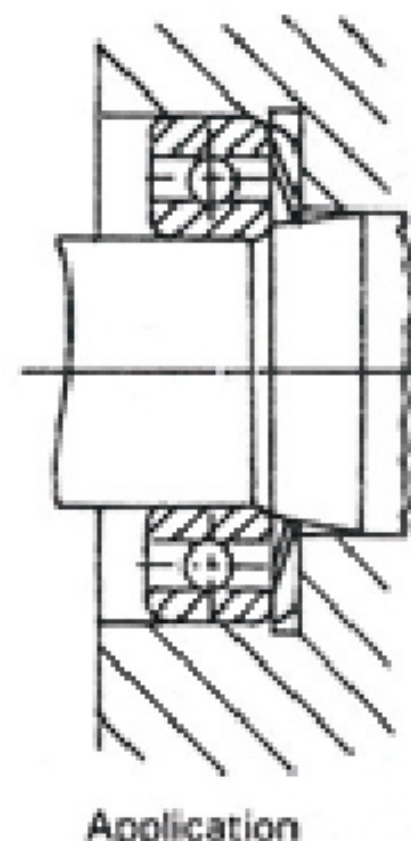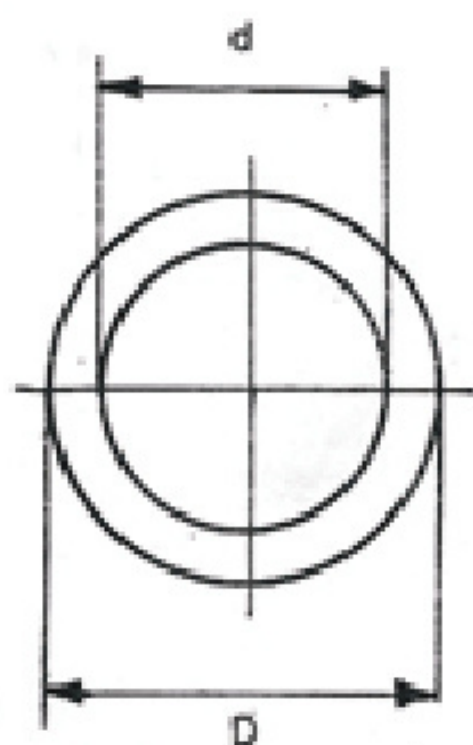


Application

Material: Carbon Spring Steel
Hardness: 40 – 50HRC


Finish: Phosphating

BEARINGS NUMBER			O.D.	I.D.	Thickness mm	Hieght Appr. mm
6309	6013	6211	99 mm	89 mm	0.5	4.0
6308	6011	6210	89 mm	79 mm	0.5	4.5
6307	0010	6208	79 mm	71 mm	0.5	4.2
6306		6207	71 mm	61 mm	0.5	3.5
6305	6007	6206	61 mm	51 mm	0.5	5.0
6304		6205	51 mm	41 mm	0.5	4.5
6302	6004		41 mm	34 mm	0.4	4.2
6300	6003	6202	34 mm	28 mm	0.4	4.3
6303	6005	6204	46.5 mm	39.5 mm	0.4	5.2
		6203	39.5 mm	34 mm	0.4	5.5
	6002	6201	31.5 mm	25.5 mm	0.3	2.5
	6000		25.5 mm	21mm	0.3	2.5

Type A

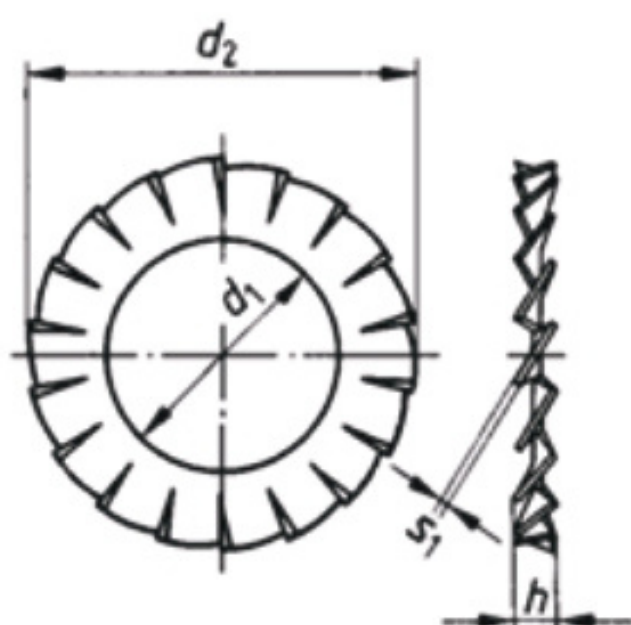


Type B

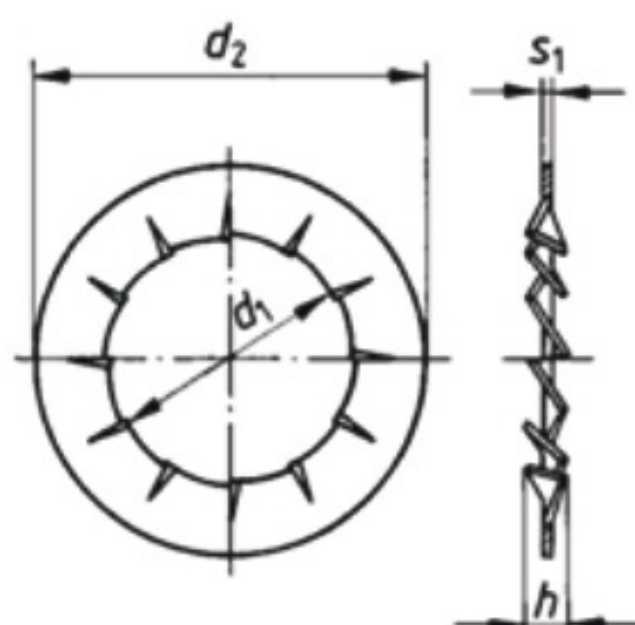

$$h \approx 3s_1$$

Type C

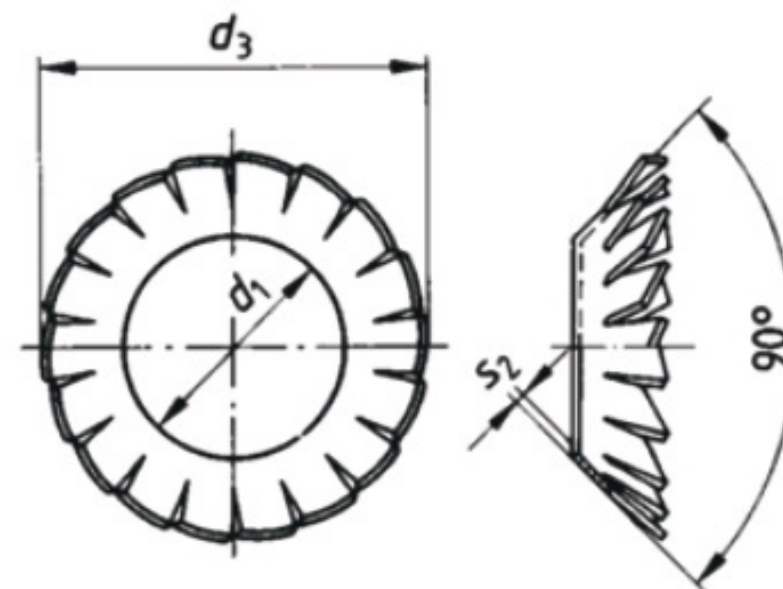


Material: Carbon Spring Steel
Hardness: 44 to 52 HRC

Finish: Phosphating or as per requirements


Nominal Size	s2 *	d1 H13	d3 h14	Number of Teeth, Min		For SCrew Thread Size
				Type A	Type B	
1.6	0.3	1.8	3.6	9	7	1.6
2	0.3	2.4	4.5	9	7	2
2.5	0.4	2.9	5.5	9	7	2.5
3	0.4	3.4	6	9	7	3
3.5	0.5	3.9	7	10	8	3.5
4	0.5	4.5	8	11	8	4
5	0.6	5.5	10	11	8	5
6	0.7	6.6	11	12	9	6
7	0.8	7.7	12.5	14	10	7
8	0.8	9	15	14	10	8
10	0.9	11	18	6	12	10
12	.1	13.5	20.5	16	12	12
14	1	15.5	24	18	14	14
16	1.2	17.5	26	18	14	16
18	1.4	20	30	18	14	18
20	1.4	22	33	20	16	20
22	1.5	24	36	20	16	22
24	1.5	27	38	20	16	24
27	1.6	30	44	22	18	27
30	1.6	33	48	22	18	30

Type C


Nominal Size	s2 *	d1 H13	d3 h14	Number of Teeth, Min	For SCrew Thread Size
2	0.2	2.2	4.2	10	2
2.5	0.2	2.7	5.1	10	2.5
3	0.2	3.2	6	12	3
3.5	0.25	3.7	7	12	3.5
4	0.25	4.3	8	14	4
5	0.3	5.3	9.8	14	2
6	0.4	6.4	11.8	16	6
8	0.4	8.4	15.3	18	8
10	0.5	10.5	19	20	10
12	0.5	13	23	26	12
14	0.6	15	26.2	28	14
16	0.6	17	30.2	30	16

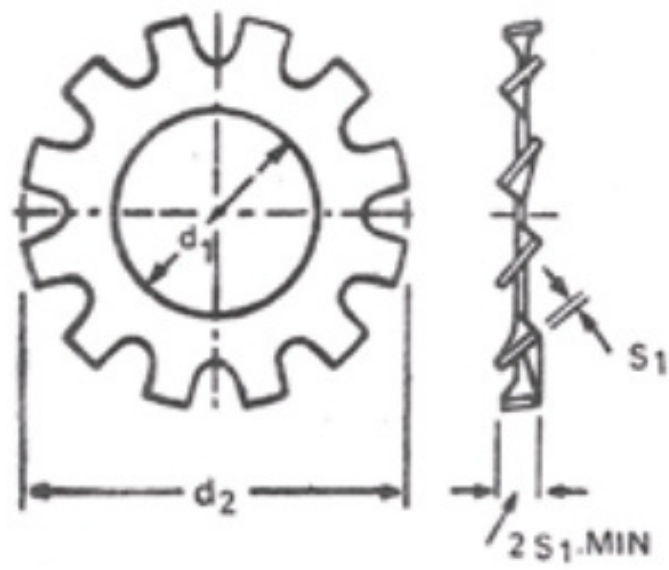

Type A: Externally Toothed T

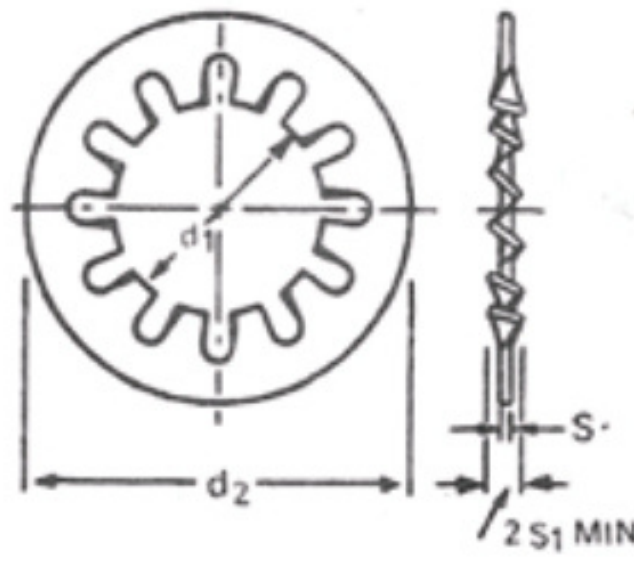

Type B: Internally Toothed

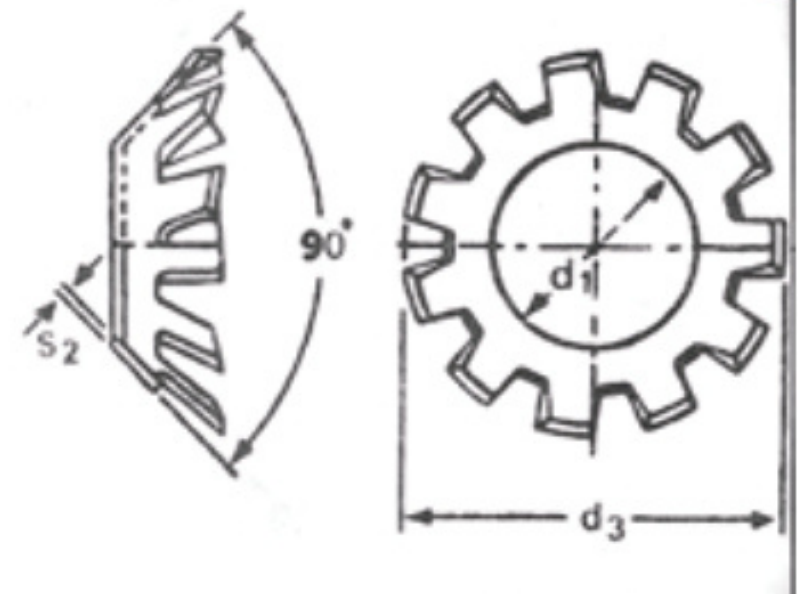





Type C: Countersunk

Material: Carbon Spring Steel

Finish: Phosphating or as per requirements

Hardness: 42 to 49 HRC

Nominal Size d1 H13	d2(h14)	d3	s1	s2	Number of Teeth		Suitable Screw Size
					Min		
					Types		
A and B		C					
1.7	3.6	-	0.3	-	6	-	M1.6
(1.9)	4	-	0.3	-	6	-	M1.8
2.2	4.5	4.2	0.3	0.2	6	6	M2
2.7	5.5	5.1	0.4	0.2	6	6	M2.6
3.2	6	6	0.4	0.2	6	6	M3
(3.7)	7	7	0.5	0.25	6	6	M3.5
4.3	8	8	0.5	0.25	8	8	M4
5.1	9	-	0.5	-	8	-	M5
5.3	10	9.8	0.6	0.3	8	8	M5
6.4	11	11.8	0.7	0.34	8	10	M6
(7.4)	12.5	-	0.8	-	8	-	M7
8.2	14	-	0.8	-	8	-	M8
8.4	15	15.3	0.8	0.4	8	10	M8
10.5	18	19	0.9	0.5	9	10	M10
12.5	20.5	23	1	0.5	10	10	M12
(14.5)	24	26.2	1	0.6	10	12	M14
16.5	26	30.2	1.2	0.6	12	12	M15
(19)	30	-	1.4	-	12	-	M18
21	33	-	1.4	-	12	-	M20
(23)	36	-	1.5	-	14	-	M22
25	38	-	1.5	-	14	-	M24
(28)	44	-	1.6	-	14	-	M27
31	48	-	1.6	-	14	-	M30

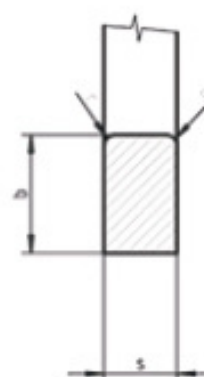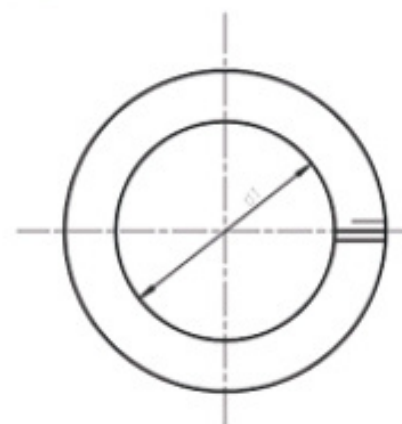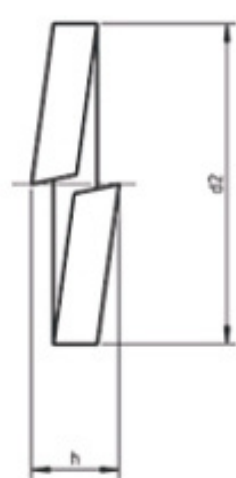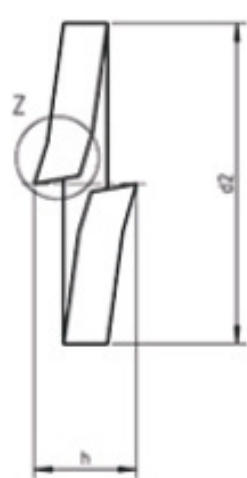

Form A: Washer with Bent Ends

Form B: Washer with Flat Ends

Material: Carbon Spring Steel

Finish: As per requirement

Hardness: 44 to 52 HRC

Nominal Size	d1		d2 Max	b		s		r	k	h2		For Bolt Nut or Screw Size
	Basic	Tol		Basic	Tol	Basic	Tol			Min	Max	
2	2.1	+0.3	4.4	0.9	+0.1	0.5	+0.1	0.1	-	1	1.2	M2
2.2	2.3		4.9	1		0.6		0.1	-	1.2	1.4	M2.2
2.3	2.6		5.1	1		0.6		0.1	-	1.2	1.4	M2.5
3	3.1		6.2	1.3		0.8		0.2	-	1.6	1.9	M3
3.5	3.6		6.7	1.3		0.8		0.2	0.15	1.6	1.9	M3.5
4	4.1	+0.4	7.6	1.5	+0.15	0.9	+0.1	0.2	0.15	1.6	2.1	M4
5	5.1		10.2	1.8		1.2		0.2	0.15	2.4	2.8	M5
6	6.1		11.8	2.5		1.6		0.3	0.2	3.2	3.8	M6
7	7.1		12.8	2.5		1.6		0.3	0.2	3.2	3.8	M7
8	8.2		14.8	3		2		0.5	0.3	4	4.7	M8
10	10.2	+0.6	18.1	3.5	+0.2	2.2	+0.15	0.5	0.3	4.4	5.2	M10
12	12.2		21.1	4		2.5		1.0	0.4	5	5.9	M12
14	14.2	+0.8	24.1	4.5		3	+0.2	1.0	0.4	6	7.1	M14
16	16.2		27.4	5		3.5		1.0	0.4	7	8.3	M16
18	18.2		29.4	5		3.5		1.0	0.4	7	8.3	M18
20	20.2	+1.0	33.6	6	+0.25	4	+0.2	1.0	0.4	8	9.4	M22
22	22.5		35.9	6		4		1.0	0.4	8	9.4	M24
24	24.5		40	7		5		1.6	0.5	10	11.8	M27
27	27.5	+1.2	43	7		5	+0.25	1.6	0.5	10	11.8	M30
30	30.5		48.2	8		6		1.6	0.8	12	14.2	M33
33	33.5		53.2	10		6		1.6	0.8	12	14.2	M36
38	36.5		58.2	10		6		1.6	0.8	12	14.2	M39
39	42.5		61.2	10		6		1.6	0.8	12	14.2	M42
42	45.5	+1.5	71.2	12		7	+0.25	2	0.8	14	16.5	M45
45	49		75	12		7		2	0.8	14	16.5	M48
48	53		83	12		7		2	0.8	14	16.5	M52
52	57		87	14		8		2	1	16	18.9	M58
56	61		91	14		8		2	1	16	18.9	M60
64	65		95	14		8		2	1	16	18.9	M64
72	73		103	14		8		2	1	16	18.9	M72
76	77		109	14		8		2	1	16	18.9	M78
80	81		111	14		8		2	1	16	18.9	M80
90	91		121	14		8		2	1	16	18.9	M90
100	101		131	14		8		2	1	16	18.9	M98



omraxis

OMRAXIS

Manufacturer of Circlips, Washers, Dowel Pins, and other Carbon Spring Steel components.

OMRAXIS is a precision components manufacturer & supplier specializing in Circlips, Washers, Dowel Pins and Spring Steel components.

OMRAXIS follows a controlled manufacturing model, where approved production facilities work as per OMRAXIS-defined quality standards, technical specifications and delivery commitments, ensuring consistent and reliable supply for industrial applications.

We support OEMs, Tier-2 and Tier-3 manufacturers with bulk and repeat supply for critical assembly applications.



Circlips

A circlip (a portmanteau of "circle" and "clip"), also known as a C-clip, Seeger ring, snap ring or Jesus clip is a type of fastener consisting of a semi-flexible metal ring with open ends which can be snapped into place, into a machined groove on a dowel pin or other part to permit rotation but to prevent lateral movement.



Dowel Pins

A dowel is a cylindrical rod, usually made from wood, plastic, or metal. In its original manufactured form, a dowel is called a dowel rod. Dowel rods are often cut into short lengths called dowel pins. Dowels are commonly used as structural reinforcements in cabinet making and in numerous other applications, including: Furniture shelf supports, Moveable game pieces, Hangers for items such as clothing, key rings, and tools.



Washers

A washer is a thin plate with a hole (typically in the middle) that is normally used to distribute the load of a threaded fastener, such as a bolt or nut. Other uses are as a spacer, spring (Belleville washer, wave washer), wear pad, preload indicating device, locking device, and to reduce vibration.

Contact Us

+91 6307207163

Information

omraxis@gmail.com

Contact & Sales Support

Location: Vasai (East), Thane

We respond within 24 hours (business days).